


DATASHEET

Mini-Wall Distributor LCdpx. 50/125 μ , OM4, 12 Pigtails / 6 Adapter

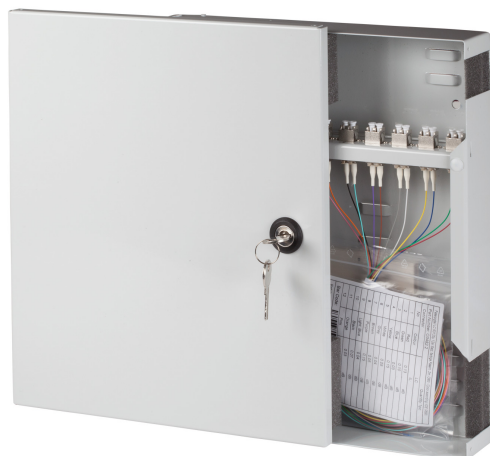

General data

Included:

Completely assembled wall distributor with adapters and coloured pigtails
 1 or 2 x Splice cassette inclusive cover
 1 or 2 x Spliceholder for 12 splices
 Housing with cover, lockable, 2 keys
 4 entries with sealing strip for incoming and outgoing cable

Dimensions: 280x320x54mm

Technical properties

Adapter material	Metall adapter
Depth	54.0 mm
Fibre class	OM3
Fibre type	Multimode 50/125
Height	280.0 mm
Mounting method	Wall mounting
Width	320.0 mm
With front plate	True
With housing	True
With pigtails	True

Available variants

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.



DATASHEET

Mini-Wall Distributor LCdpx. 50/125μ, OM4, 12 Pigtails / 6 Adapter

ArtNr.	Bezeichnung	Colour Pigtail		Type of connector external	With number of couplings/adapters	RAL-number	Type of connector interior	Adapter colour
B78902.12OM3	Mini-Wall Distributor LCdpx. 50/125μ, OM4, 12 Pigtails / 6 Adapter	grey	12 x SC	LC-Duplex	6	7035	LC-Duplex	metal
B78902.24OM3	Mini-Wall Distributor LCdpx. 50/125μ, OM3, 24 Pigtails / 12 Adapter	grey	24 x SC	LC-Duplex	12	7035	LC-Duplex	metal

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 21-09-2026 . Technical changes reserved.

