


DATASHEET

Dome closure flat 380mm high, 290 x 150mm



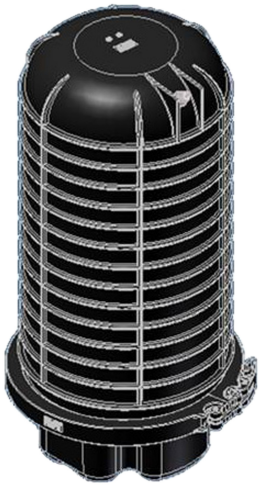





General data

Two oval ports for uncut tubes or loop-cable. Eight round ports with each 32mm diameter. Cable entries with mechanical seal at customer choice, see accessories. Splice trays with crimmp- or heat splice holder, see accessories.

Technical properties

Colour	black
Degree of protection	IP68
Direct Burial	True
Material	Plastic
Operating Temperature	-40 – 70 °C
Splice Cassette	without cassette
Splice Holder	without
Suitable for number of fibres	288
Type of closure	Connecting closure
UV resistant	True

Available variants

ArtNr.	Bezeichnung	Unique

This datasheet was created automatically on 11-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Dome closure flat 380mm high, 290 x 150mm

CFOC2-AA	Dome closure flat 380mm high, 290 x 150mm	Unique
CFOC2-AB	Dome socket flat 450mm high, 290 x 150mm	oval
FOC2-CB	Dome closure round 525mm high, D=285mm	round

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION