
DATASHEET

RJ45 Patch Cord Cat.6A S/FTP FRNC VC LED blau 1,5m

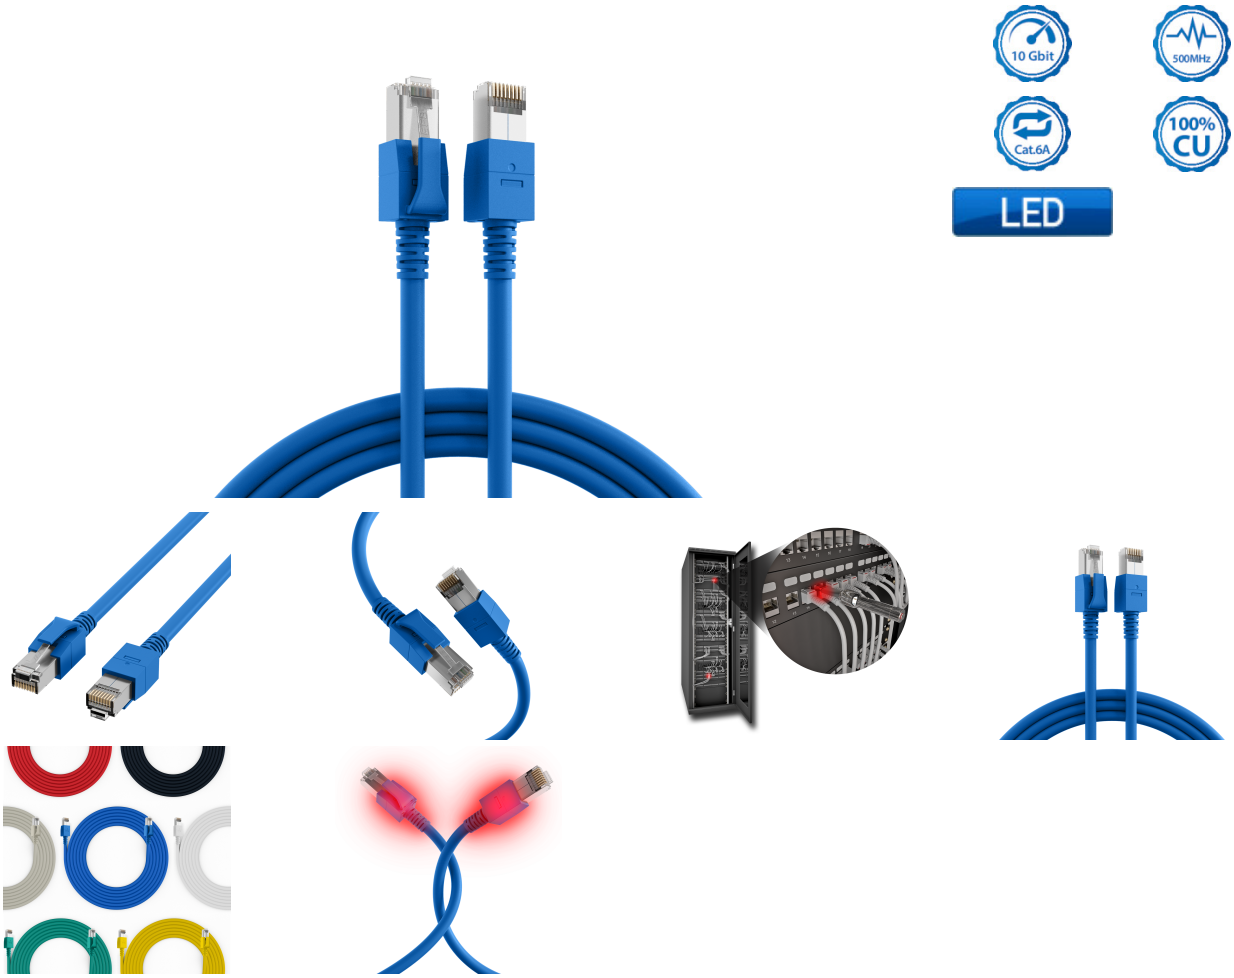

General data

RJ45 patch cable Cat.6A S/FTP FRNC VC LED

The Cat.6A (TIA) patch cable has gold-plated contacts and enables 10Gbit Ethernet as a transmission standard.

Technical product properties
• Cat.6A (TIA)
• S/FTP cable with AWG26/7
• Jacket material made of halogen-free LSZH
• Fire protection: flame-retardant, halogen-free, low smoke
• Plug connection: RJ45 to RJ45
• With locking lever protection< br>• Has gold-plated contacts

The jacket of the shielded patch cable is made of halogen-free LSZH material and has a length imprint on the

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

RJ45 Patch Cord Cat.6A S/FTP FRNC VC LED blau 1,5m

grommet. The cable also offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The RJ45 LED connector makes it easy to track the cable route. The assignment is according to TIA/EIA 568B and is 1:1.

The LAN cable has a conductor material made of copper and is ideal for applications in structured building cabling, industrial Ethernet and in data centers. The bandwidth is up to 500 MHz.

Technical properties	
AWG-size	26/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	put-on
Area of application	Data center
Bandwidth	500MHz
Bending radius	>20 mm
Cable construction	4x2
Cable type	S/FTP
Cabling standard	ANSI/TIA-568
Category	6A (TIA)
Colour anti-kink sleeve	white
Colour outer sheath	blue
Conductive shield	360° shield contact
Conductor Material	Copper
Conductor resistance DC	165 Ω/km
Connector	IEC 60603-7-51
Connector type	RJ45 LED
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-3
Halogen free	acc. IEC60754-2
Impedance	100 ±15 Ω
Insulation Resistance	> 5000 MΩ
Length imprint	True
Locking lever	True
Loop resistance	330 Ω/km
Low smoke	acc. IEC61034
Material outer sheath	LSZH
Mating cycles	≥750

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.6A S/FTP FRNC VC LED blau 1,5m

Model	shielded
NVP value	0 %
Oil resistant	no
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	6.2 mm
Ozone resistance	No
Pin assignment	1:1
Resistant to chemicals	False
Suitable for degree of protection (IP)	IP20
Temperature Range (Installation)	0 – 50 °C
Temperature Range (Operation)	-25 – 60 °C
Test voltage	1000 (V DC, 1min) core/core und core/screen
Total screening	65 %
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
DCK1001BL.1,5	RJ45 Patch Cord Cat.6A S/FTP FRNC VC LED blau 1,5m	1.5 m	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION