


DATASHEET

Interf.Cover-plastic 25-25pole, grey

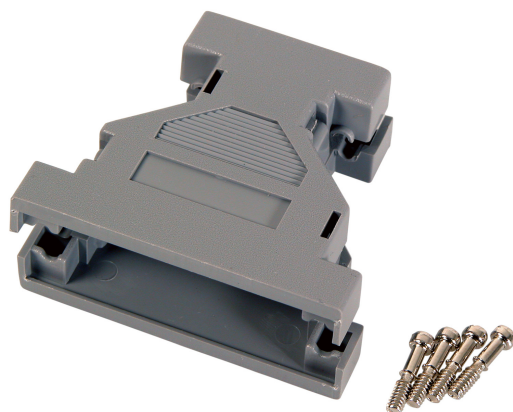

General data

The D-Sub empty housing D-Sub 25-pin/D-Sub 25-pin. from EFB-Elektronik is designed as a plastic housing in a gray design. It is suitable for 25-pin connectors and supports a compact, standard-compliant implementation of interface applications.

- Plastic housing in grey design
- Suitable for 25-pin D-Sub connectors
- Designed as D-Sub 25-pin/D-Sub 25-pin. Empty housing

The material plastic supports a robust and practical protection solution for technical applications where a precisely fitting empty housing for D-Sub interfaces is required. The temperature range from 0 to 45 °C describes the intended application framework and complements the design for typical installations in the technical environment.

Technical details

- Type: D-Sub 25-pin/D-Sub 25-pin.
- Material: Plastic
- Colour: grey
- Suitable for number of poles: 25
- Temperature range: 0 – 45 °C
- Brand: EFB-Elektronik

Technical properties

Locking mechanism	Screw
Material	Plastic
Separable	True
Temperature range	0 – 45 °C
Two piece	True

This datasheet was created automatically on 16-10-2026 . Technical changes reserved.



DATASHEET

Interf.Cover-plastic 25-25pole, grey

Available variants

ArtNr.	Bezeichnung	Colour	Suitable for number of poles	Type
EB0909	Interf.Cover-plastic 09-09pole, grey	grey	9	Empty case, Gender Changer
EB0909V2	Interf.Cover-plastic 09-09pole, grey	grey	9	Empty case, Gender Changer
EB2525	Interf.Cover-plastic 25-25pole, grey	grey	25	Empty case, Gender Changer
EB2525V2	Interf.Cover-plastic 25-25pole, grey	grey	25	Empty case, Gender Changer

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 16-10-2026 . Technical changes reserved.

