


DATASHEET

USB 3.2 Gen2 10Gbit 3A Extender Cable, Type-C Plug - Type-C Jack, 0.2m

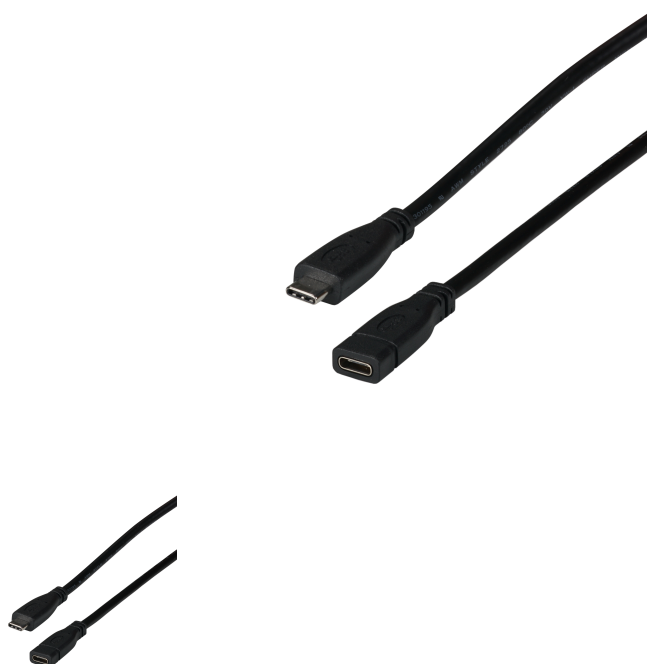

General data

USB3.2 Gen2x2 SuperSpeed extension with type-C male to type-C female
10Gbit/s transmission speed
Charging with up to 60W / 20V / 3A
Reversible Type-C interface

Technical properties

3D	False
ARC	False
Backwards compatible	True
Bending radius (dynamic/static)	25 mm
CEC	False
Cable set	False
Cable type (passive/active/optical)	passive
Chip	True
Connection type connection 1	Plug
Connection type connection 2	jack
Connector 1 angulation	180°

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

USB 3.2 Gen2 10Gbit 3A Extender Cable, Type-C Plug - Type-C Jack, 0.2m

Connector 2 angulation	180°
Contact Plating	silver-plated
DSC	False
Dust cover	false
Enhanced Color	Deep Color
Fast Charging technologie	PD 3.0
HDMI Power	False
HDMI certified	False
HEC (Ethernet channel)	False
Halogenfree	No
Kink protection	True
MSA	False
MST	False
Material Connector Housing	PVC molded
Material Inner Conductor	BC
Material jacket	PVC
Max. mating cycles	10000
Model	Round Cable
Number of poles connection 1	24
Number of poles connection 2	24
Number of shieldings	triple
Operating temperature	-5 - 45 °C
PCIe Data transfer	False
Plug dimensions Side 1	12.2*6.6*28mm
Plug dimensions Side 2	12.8*5.74*30mm
Power Delivery	100 W
Printing	USB3.1 CABLE E352563 AWM 20276 80°C 30V VW-1
Scope of delivery	1xUSB Cable
Shielded	True
Speed	10 Gbit/s
Supported audio formats	compressed Audio format (Dolby Digital, Dolby TrueHD, DTS, DTS-HD Master Audio, Dolby Atmos)
Temperature	-20 - 70 °C
Tensile strength (short/long)	98,1 N
Type of connector connection 1	USB Type-C
Type of connector connection 2	USB Type-C

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

USB 3.2 Gen2 10Gbit 3A Extender Cable, Type-C Plug - Type-C Jack, 0.2m

Type of packaging	plastic bag
Type of signal	Digital
VESA certified	False
VRR	False
Various lengths cable set	1x0.2m
Version	USB 3.2 Gen 2
Warranty	36 months
With termination resistor	False
eARC	False

Available variants

ArtNr.	Bezeichnung	Colour	Length	Diameter	AWG
EBUSBC-USBC10GE.0,2	USB 3.2 Gen2 10Gbit 3A Extender Cable, Type-C Plug - Type-C Jack, 0.2m	black	0.2 m	5.0 mm	24AWG
EBUSBC-USBC10GE.1	USB 3.2 Gen2 10Gbit 3A Extender Cable, Type-C Plug - Type-C Jack, 1.0m	black	1.0 m	5.0 mm	24AWG

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

