


DATASHEET

Power Cable CEE7/7 90° - C19 180°, Black, 1.8 m, 3 x 1.50 mm²

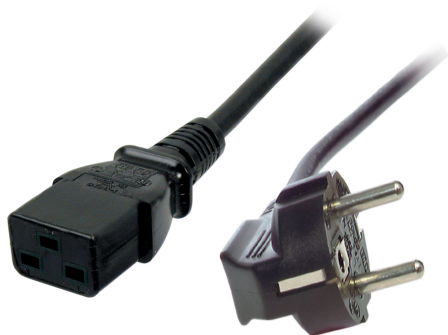

General data

The power cable protective contact 90° - C19 180° black from EFB-Elektronik is designed as a practical connection cable for use in the European environment. With a safety plug (type F) in a right-angle design and an IEC socket in a straight design, it is suitable for standard-compliant and space-saving connections.

- 1.8 m length for flexible integration
- 90° angulation on the safety plug and 180° connection on the IEC socket
- Black PVC outer jacket for a robust design

The design with three wires, protective conductors and a nominal voltage of 250 V at 16 A supports use in technical applications with common grid requirements. The PVC-sheathed version suitable for Europe complements the line as a functional solution for standardized device connections.

Technical details

- Brand: EFB-Elektronik
- Core Count: 3
- Connector 1: Safety plug (type F), right-angled
- Connector 1 angle: 90°
- Connection 2: IEC socket straight
- Connector 2 angle: 180°
- Outer jacket colour: black
- Country suitability: Europe
- Sheath material: Polyvinyl chloride (PVC)
- Nominal voltage: 250 V
- Rated current: 16 A
- Protective conductor available

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C19 180°, Black, 1.8 m, 3 x 1.50 mm²

Technical properties	
Cable printing	VDE H05VV-F 3G1.5mm ² ZHEJIANG JINTING NUCLEAR CABLE CO.,LTD. www.efb-elektronik.de CE
Colour outer sheath	black
Connection 1	Plug with protective contact (type F), right-angled
Connection 2	Cold device plug straight, female
Connector 1 angulation	90 °
Connector 2 angulation	180 °
Country suitability	Europe
Halogen free	False
Locking mechanism	False
Material outer sheath	Polyvinyl chloride (PVC)
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Plug imprint	JT008 VDE 250V 16A
Protective conductor	True
Security certificates	VDE
Spiralized cable	False
Storage Temperature	-15 - 70
Type of packaging	Labeled polybag
Warranty	24 month
With cord switch	False

Available variants								
ArtNr.	Bezeichnung	Colour outer sheath	Degree of protection	Length	Nominal current	Nominal voltage	Nominal cross section conductor	Outer diameter approx.
EK511W.1,8	Power Cable CEE7/7 90° - C19 180°, Black, 1.8 m, 3 x 1.50 mm ²	black	IP20	1.8 m	16 A	250 V	1.5 mm ²	8.2 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-10-2026 . Technical changes reserved.

