


DATASHEET

Extension Cable C20 180° - C19 180°, Black, 1.8 m, 3 x 1.50 mm², LSZH

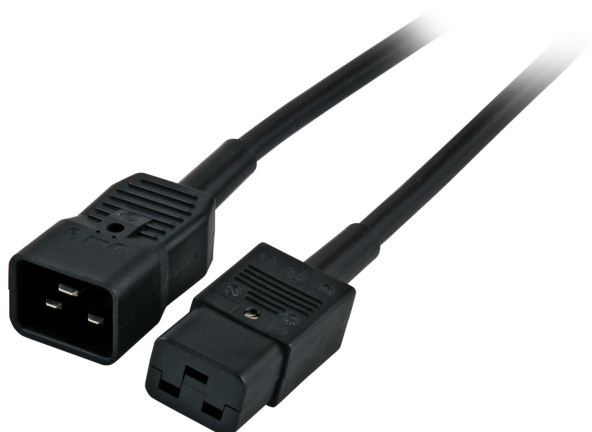

General data

The C20 180° - C19 180° IEC extension from EFB-Elektronik is designed in black with LSZH and is intended for standard-compliant connections in technical applications. With a length of 1.8 m, it is suitable for compact installations where a reliable extension of the power supply is required.

- Black finish for unobtrusive integration
- Halogen-free design and with protective conductor

The TPE sheath supports a practical and resilient cable design. With 3 wires and protective conductors, the extension is intended for standardised use in IEC connections. The combination of IEC plug and IEC socket straight ensures a clearly defined connection geometry in existing systems.

Technical details

- Brand: EFB-Elektronik
- Core Count: 3
- Connector 1: IEC plug
- Connection 2: IEC socket straight
- Outer jacket colour: black
- Halogen-free
- Sheath material: TPE
- Protective conductor available

Technical properties

Colour outer sheath	black
Connection 1	Cold device plug (IEC 60320)
Connection 2	Cold device plug straight, female

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

Extension Cable C20 180° - C19 180°, Black, 1.8 m, 3 x 1.50 mm², LSZH

Halogen free	True
Material outer sheath	TPE
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Protective conductor	True
Spiralized cable	False
With cord switch	False

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	Nominal cross section conductor	Outer diameter approx.
EK519ZH.1,8	Extension Cable C20 180° - C19 180°, Black, 1.8 m, 3 x 1.50 mm², LSZH	black	1.8 m	1.5 mm²	8.6 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

