


DATASHEET

Power Cable CEE7/7 180° - C13 90°, Black, 2.0 m, 3 x 0.75 mm²

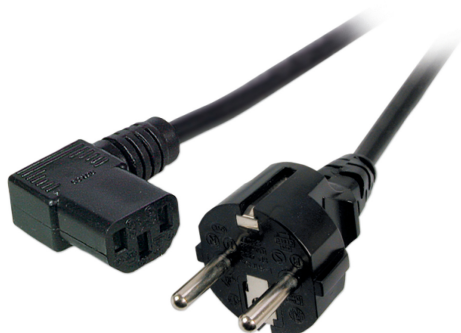

General data

The power cable protective contact 180° - C13 90° from EFB-Elektronik is designed as a power cable SCHUKO 180° 2 m for use in Europe. With a black outer jacket, a length of 2.0 m and the combination of a safety plug (type F) and an angled IEC socket, it is suitable for standard-compliant and space-saving power connections in various applications.

- Safety plug (type F) straight with 180° angulation and IEC socket angled with 90°
- Black outer jacket with protective conductor for use in Europe

The three-pole structure is designed for a reliable energy supply of technical systems. With a nominal voltage of 250 V, a nominal current of 10 A, an operating temperature range of 0 - 70 °C and a polyvinyl chloride (PVC) sheath material, the cable supports practical integration into existing installations.

Technical details

- Core Count: 3
- Connector 1: safety plug (type F), straight
- Connector 1 angle: 180°
- Connection 2: Angled IEC socket
- Connector 2 angle: 90°
- Outer jacket colour: black
- Operating temperature: 0 - 70 °C
- Country suitability: Europe
- Sheath material: Polyvinyl chloride (PVC)
- Nominal voltage: 250 V
- Rated current: 10 A
- Protective conductor available
- Brand: EFB-Elektronik

This datasheet was created automatically on 14-09-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 180° - C13 90°, Black, 2.0 m, 3 x 0.75 mm²

Technical properties	
Bending radius (dynamic/static)	68 mm
Cable printing	H05VV-F 3G 0.75mm ² D S N FI ÖVE KEMA-KEUR VDE N20050 GTSA-3 3G 0.75mm@ MSL CE
Colour outer sheath	black
Connection 1	Plug with protective contact (type F), straight
Connection 2	Cold device plug angled, female
Connector 1 angulation	180 °
Connector 2 angulation	90 °
Country suitability	Europe
Halogen free	No
Locking mechanism	False
Material outer sheath	Polyvinyl chloride (PVC)
Max. mating cycles	10000
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Operating temperature	0 – 70 °C
Protective conductor	True
Scope of delivery	Power cord
Security certificates	VDE
Spiralized cable	False
Storage Temperature	-10 – 80 °C
Tensile strength (short/long)	mm
Type of packaging	Labeled polybag
Warranty	24 month
With cord switch	False

Available variants								
ArtNr.	Bezeichnung	Colour outer sheath	Length	Nominal current	Nominal voltage	Reaction-to-fire class according to EN 13501-6	Nominal cross section conductor	Outer diameter approx.

This datasheet was created automatically on 14-09-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 180° - C13 90°, Black, 2.0 m, 3 x 0.75 mm²

EK534.2	Power Cable CEE7/7 180° - C13 90°, Black, 2.0 m, 3 x 0.75 mm ²	black	2.0 m	10 A	250 V	Dca	0.75 mm ²	6.8 mm
EK534.3	Power Cable CEE7/7 180° - C13 90°, Black, 3.0 m, 3 x 1.00 mm ²	black	3.0 m	10 A	250 V	Dca	1.0 mm ²	7.1 mm
EK534.5	Power Cable CEE7/7 180° - C13 90°, Black, 5.0 m, 3 x 1.00 mm ²	black	5.0 m	10 A	250 V	Dca	1.0 mm ²	7.1 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 14-09-2026 . Technical changes reserved.

