


DATASHEET

Power Cable CEE7/7 90° - C13 90°, Black, 2.0 m, 3 x 0.75 mm²

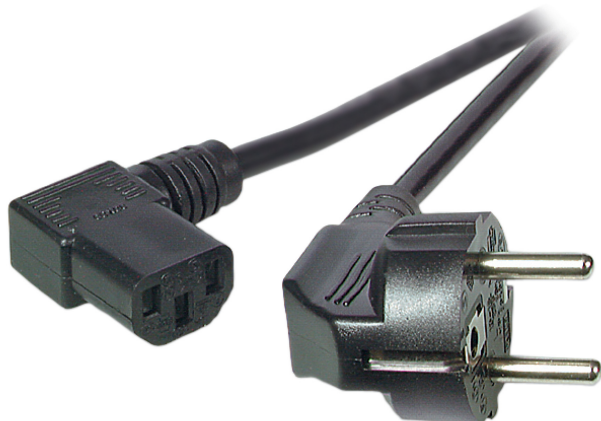

General data

The power cable protective contact 90° - C13 90° black from EFB-Elektronik is designed as a 2.0 m long connection cable for standard-compliant power connections. With a right-angle safety plug (type F) and angled IEC socket, it is suitable for applications with space-saving cable routing.

- Black version with a length of 2.0 m
- Safety plug (type F) and IEC socket each with 90° angulation
- Designed with protective conductor for use in Europe

The cable structure with 3 wires and sheath made of polyvinyl chloride (PVC) supports practical integration into technical systems. The design for 250 V at 10 A and the operating temperature range of 0 to 70 °C describe the intended application framework for common mains connections.

Technical details

- Brand: EFB-Elektronik
- Core Count: 3
- Connector 1: Safety plug (type F), right-angled
- Connector 1 angle: 90°
- Connection 2: Angled IEC socket
- Connector 2 angle: 90°
- Outer jacket colour: black
- Operating temperature: 0 - 70 °C
- Country suitability: Europe
- Sheath material: Polyvinyl chloride (PVC)
- Nominal voltage: 250 V
- Rated current: 10 A
- Protective conductor available

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 90°, Black, 2.0 m, 3 x 0.75 mm²

Technical properties	
Bending radius (dynamic/static)	68 mm
Cable printing	H05VV-F 3G 0.75mm ² D S N FI ÖVE KEMA-KEUR VDE N20050 GTSA-3 3G 0.75mm@ MSL CE
Colour outer sheath	black
Connection 1	Plug with protective contact (type F), right-angled
Connection 2	Cold device plug angled, female
Connector 1 angulation	90 °
Connector 2 angulation	90 °
Country suitability	Europe
Halogen free	No
Locking mechanism	False
Material outer sheath	Polyvinyl chloride (PVC)
Max. mating cycles	10000
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Operating temperature	0 – 70 °C
Protective conductor	True
Scope of delivery	Power cord
Security certificates	VDE
Spiralized cable	False
Storage Temperature	-10 – 80 °C
Tensile strength (short/long)	mm
Type of packaging	Labeled polybag
Warranty	24 month
With cord switch	False

Available variants								
ArtNr.	Bezeichnung	Colour outer sheath	Length	Nominal current	Nominal voltage	Reaction-to-fire class according to EN 13501-6	Nominal cross section conductor	Outer diameter approx.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C13 90°, Black, 2.0 m, 3 x 0.75 mm²

EK535.2	Power Cable CEE7/7 90° - C13 90°, Black, 2.0 m, 3 x 0.75 mm ²	black	2.0 m	10 A	250 V	Dca	0.75 mm ²	6.8 mm
EK535.3	Power Cable CEE7/7 90° - C13 90°, Black, 3.0 m, 3 x 1.00 mm ²	black	3.0 m	10 A	250 V	Dca	1.0 mm ²	7.1 mm
EK535.5	Power Cable CEE7/7 90° - C13 90°, Black, 5.0 m, 3 x 1.00 mm ²	black	5.0 m	10 A	250 V	Dca	1.0 mm ²	7.1 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

