
DATASHEET

Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm²

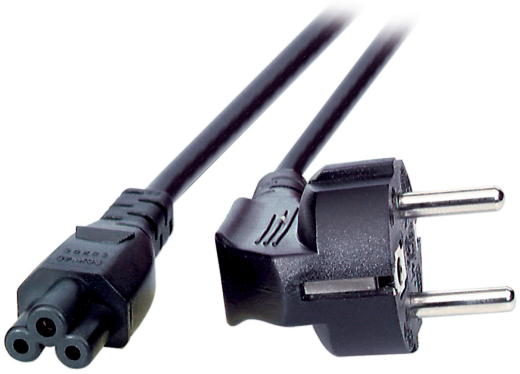

General data

The 90° - C5 180° power cable from EFB-Elektronik is designed as a 1.8 m long SCHUKO 90° power cable for use in Europe. With safety plug (type F), right-angle design and C5 cloverleaf coupling, it is suitable for standard-compliant power connections in compact installations. The black outer jacket colour underlines the inconspicuous and practical design.

- Safety plug (type F) with 90° angulation and right-angle design
- C5 cloverleaf coupling with 180° angulation for European use

The polyvinyl chloride (PVC) sheath supports robust cable routing that is suitable for everyday use. With 3 wires, protective conductors and a nominal voltage of 250 V and a nominal current of 2.5 A, the cable is adapted to typical mains connections and designed for technical applications with standardised plug connections.

Technical details
- Brand: EFB-Elektronik
- Connector 1: Safety plug (type F), right-angled
- Connector 1 angle: 90°
- Port 2: C5 cloverleaf coupling
- Connector 2 angle: 180°
- Core Count: 3
- Outer jacket colour: black
- Sheath material: Polyvinyl chloride (PVC)
- Nominal voltage: 250 V
- Rated current: 2.5 A
- Protective conductor available
- Country suitability: Europe

This datasheet was created automatically on 09-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm²

Technical properties	
Cable printing	VDE H05VV-F 3G0.75mm² ZHEJIANG JINTING NUCLEAR CABLE CO.,LTD. www.efb-elektronik.de CE
Colour outer sheath	black
Connection 1	Plug with protective contact (type F), right-angled
Connection 2	C5 Mickey Mouse female
Connector 1 angulation	90 °
Connector 2 angulation	180 °
Country suitability	Europe
Halogen free	No
Locking mechanism	False
Material outer sheath	Polyvinylchlorid (PVC)
Nominal voltage	250 V
Number of cores	3
Oil resistant (acc. EN 60811-2-1)	False
Oil resistant (according to EN 60811-404)	False
Plug imprint	JT008 VDE 250V 16A
Protective conductor	True
Security certificates	VDE
Spiralized cable	False
Type of packaging	Labeled polybag
Warranty	24 month
With cord switch	False

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Degree of protection	Length	Nominal current	Nominal voltage	With protective conductor	Nominal cross section conductor	Outer diameter approx.
EK552.1,8V2	Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm²	black	IP20	1.8 m	2.5 A	250 V	Ja	0.75 mm²	6.5 mm
EK552.3V2	Power Cable CEE7/7 90° - C5 180°, Black, 3.0 m, 3 x 0.75 mm²	black	IP20	3.0 m	2.5 A	250 V	Ja	0.75 mm²	6.5 mm

This datasheet was created automatically on 09-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm²

EK552.5V2	Power Cable CEE7/7 90° - C5 180°, Black, 5.0 m, 3 x 0.75 mm²	black	IP20	5.0 m	2.5 A	250 V	Ja	0.75 mm²	6.5 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION