


DATASHEET

Modular-Adapter D-Sub09 Plug / RJ45 Jack, metallized housing

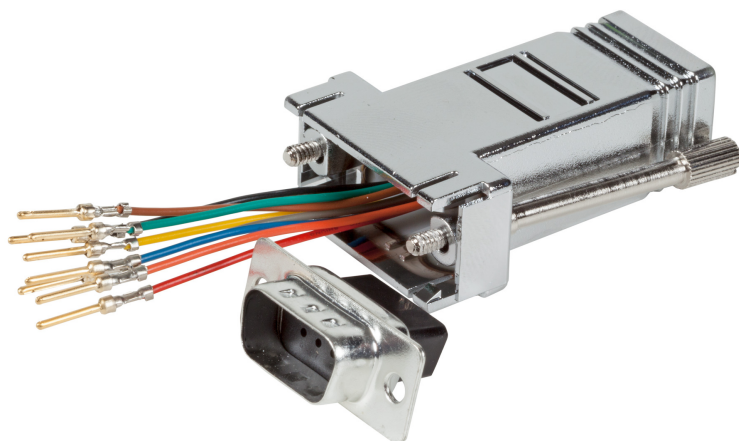

General data

Freely configurable
D-Sub connector to RJ45 8P8C Jack
Metallized housing
Also available pre-assembled with pin allocation as requested

Technical properties

Assembly	Desktop
Category	3
Construction type	straight
Model	plug/jack
Temperature Range (Operation)	0 - 70 °C
Type of connector	D-Sub09/RJ45

Available variants

ArtNr.	Bezeichnung	screened
ETM23066	Modular-Adapter D-Sub09 Plug / RJ45 Jack, metallized housing	True

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.

