


DATASHEET

DIN RAIL adapter for SC/APC Singlemode, 1 Port

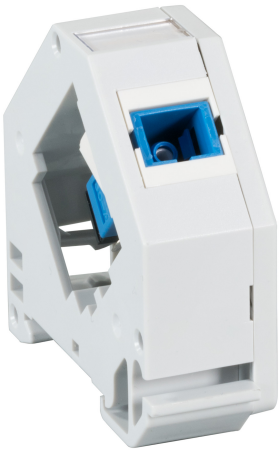


General data

Fiber optic connection unit equipped with LC duplex or SC simplex for mounting on DIN rail TS35
Compact design
Closed on one side
Strain relief with cable ties

Delivery without end plate left (ET-25185.1)
An end plate left is always necessary. DIN RAIL adapter requires an end plate left, several connected also require only one end plate left.

Technical properties

Abmessungen (WxHxD)	22 x 61 x 54 mm
Colour	light grey

This datasheet was created automatically on 04-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

DIN RAIL adapter for SC/APC Singlemode, 1 Port

For DIN-rail acc. DIN EN60715	True
Material	Plastic
RAL colour	RAL7035
Stackable	True
Suitable for	1 module (keystone format)
Type of DIN-rail adapter	Inclined
Type of fastening	DIN rail (top hat rail) 35 mm
With earthing spring	True
With labeling field	True

Available variants

ArtNr.	Bezeichnung	Number of ports	assembly	Colour of adapter
FTTH-DINRAIL-LC	DIN RAIL adapter for LC Singlemode, 2 Ports	2	1x LC-Duplex	blue
FTTH-DINRAIL-LCA	DIN RAIL adapter for LC/APC Singlemode, 2 Ports	2	1x LC-Duplex	green
FTTH-DINRAIL-SCA	DIN RAIL adapter for SC/APC Singlemode, 1 Port	1	1x SC-Simplex	green

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de