


DATASHEET

FTTH Module for FTTH-BGT, 12 Port LC/APC with OS2 ceramic adapter

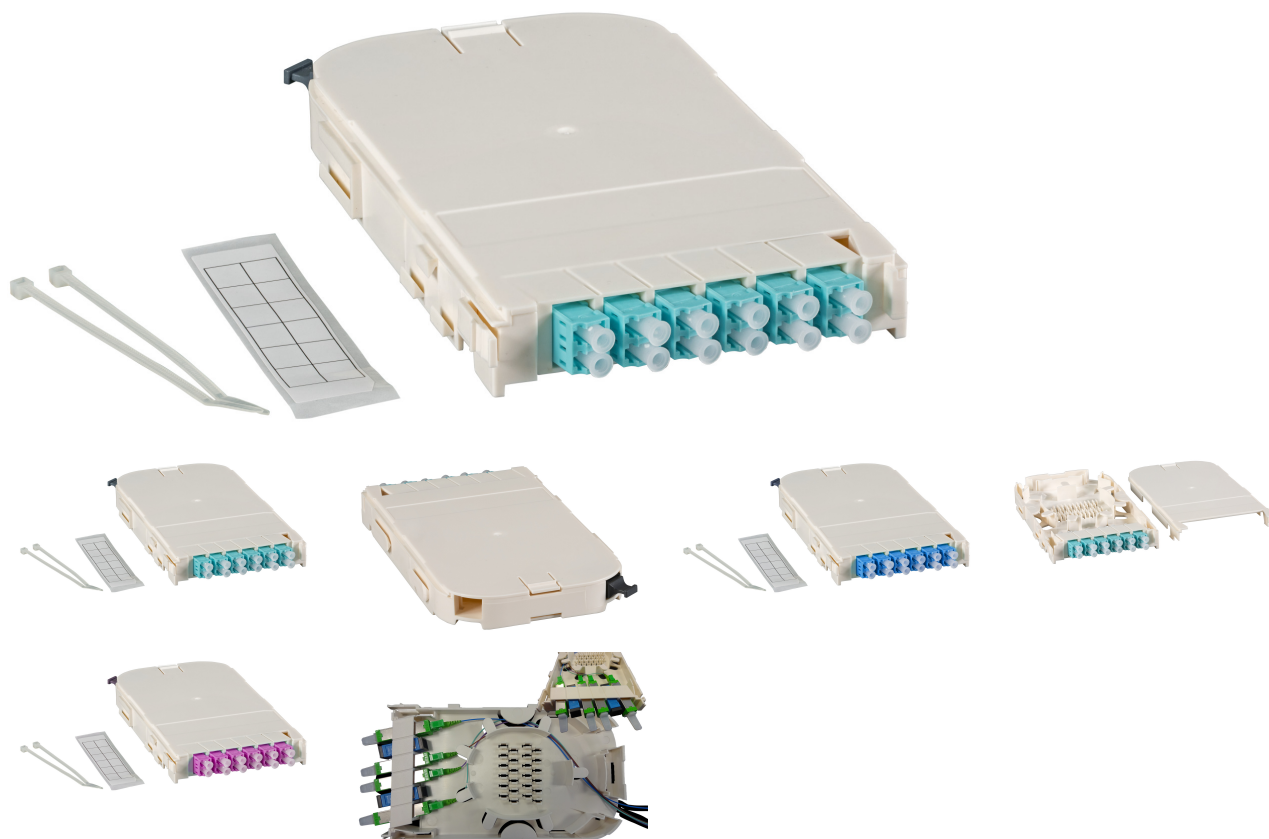

General data

Suitable for 1U and 3U subrack FTTH-BGT-xHE

Pre-equipped with 6 LC-Duplex adapter in single mode, multimode OM4 or multimode OM3 with ceramic ferrule

Inclined outlet left/right for the 1HE version, top/bottom outlet for the 3HE version

Cable entry via MTP®/MPO adapter

Splice cassette (Shrink -and Crimpprotection) holder included in cassette for MTP®/ MPO free installation

Delivery without Pigtail and MTP®/MPO adapter

On request, the modules can also be equipped with E2000 adapters and pigtails.

Technical properties

Number of height units	0.5 U
With pigtails	False

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

DATASHEET

FTTH Module for FTTH-BGT, 12 Port LC/APC with OS2 ceramic adapter

Available variants

ArtNr.	Bezeichnung	APC-version	Adapter Colour	Modules	Adapter	Quantity adapter
FTTH-MODUL-LCAPC	FTTH Module for FTTH-BGT, 12 Port LC/APC with OS2 ceramic adapter	True	green	Singlemode	LC duplex	6
FTTH-MODUL-LCOM4	FTTH Module for FTTH-BGT, 12 Port LC with OM4 ceramic adapter	False	erica-violet	Multimode OM4	LC duplex	6
FTTH-MODUL-LCOS2	FTTH Module for FTTH-BGT, 12 Port LC with OS2 ceramic adapter	False	blue	Singlemode	LC duplex	6

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

