


DATASHEET

FTTH Module for FTTH-BGT, 6 Port SC with OM3 ceramic adapter

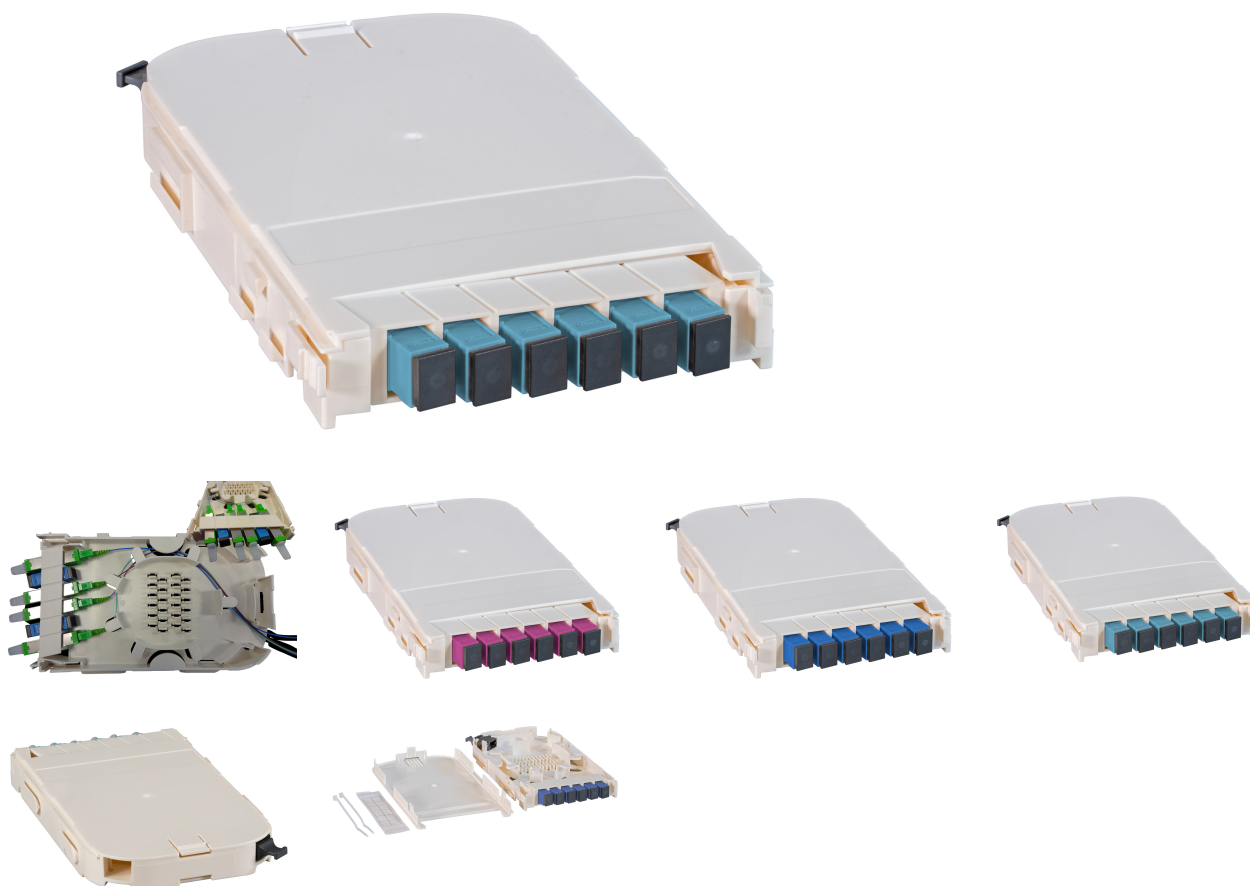

General data

Suitable for 1U and 3U subrack FTTH-BGT-xHE

Pre-equipped with 6 SC-Simplex adapter in single mode, multimode OM4 or multimode OM3 with ceramic ferrule

Inclined outlet left/right for the 1HE version, top/bottom outlet for the 3HE version

Cable entry via MTP®/MPO adapter

Splice cassette (Shrink -and Crimp protection) holder included in cassette for MTP®/ MPO free installation

Delivery without Pigtail and MTP®/MPO adapter

On request, the modules can also be equipped with E2000 adapters and pigtails.

Technical properties

Number of height units	0.5 U
------------------------	-------

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

DATASHEET

FTTH Module for FTTH-BGT, 6 Port SC with OM3 ceramic adapter

With pigtails | False

Available variants

ArtNr.	Bezeichnung	APC-version	Adapter Colour	Modules	Adapter	Quantity adapter
FTTH-MODUL-SCOM3	FTTH Module for FTTH-BGT, 6 Port SC with OM3 ceramic adapter	False	aqua	Multimode OM3	SC	6

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

