


DATASHEET

Fiber Pigtail LC/APC OS2 G657A2-colored set 2m - 12 pieces

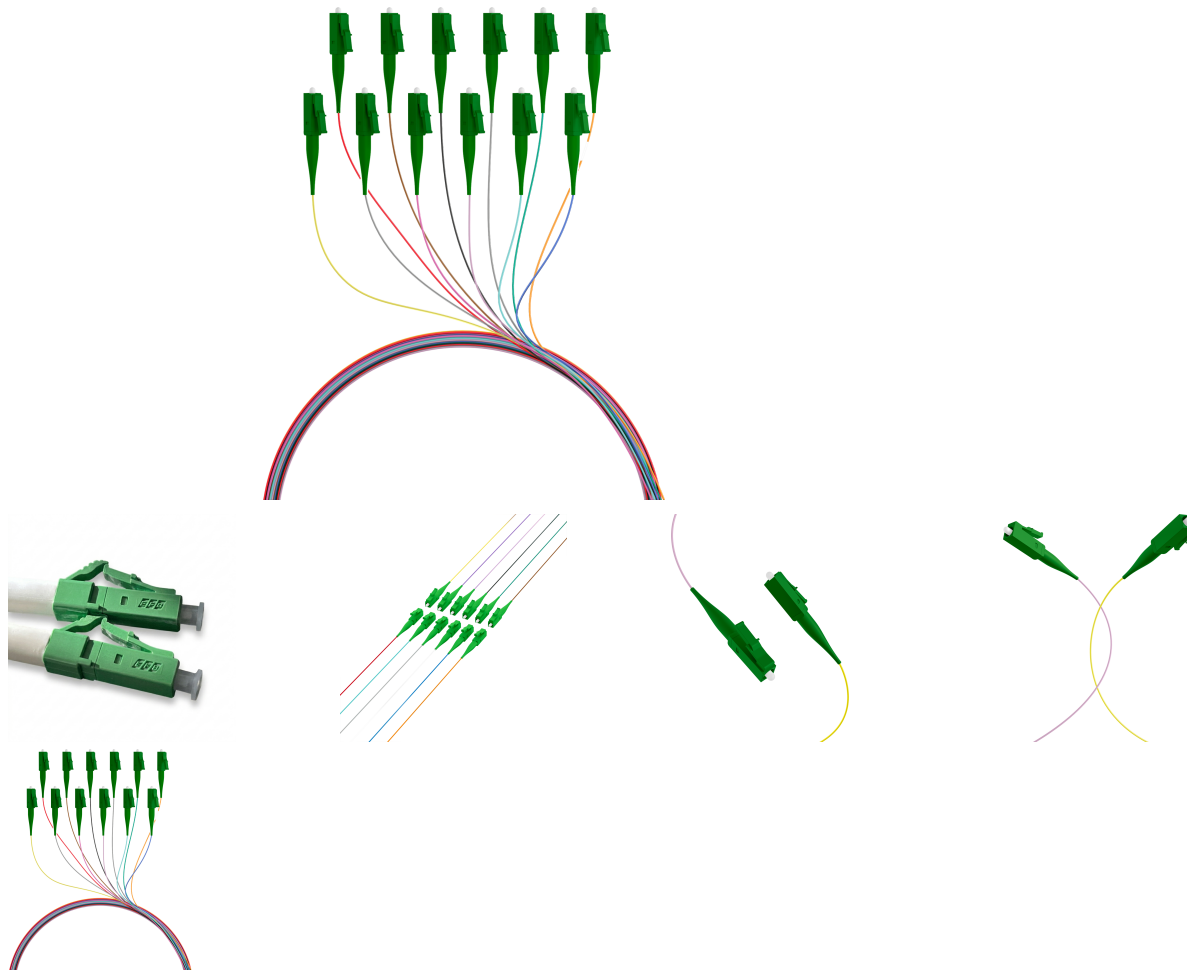

General data

The LC fiber pigtail set consists of 12 pigtails. The 12 pigtails are coloured according to colour code DIN VDE 0888 red, green, blue, yellow, white, grey, brown, violet, turquoise, black, orange and pink. The colour of the 900 μ jacket is equal to the colour of the 250 μ jacket. All 12 pigtails are packed in a polybag. Each connector is packed separately for an easy remove of each pigtail. Every PU contains an individual measuring protocol.

Technical properties

Anti-kink sleeve	put-on
Bend optimized fiber	yes
Buffer	loose
Cable Conform to Standard	IEC60793-2

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

DATASHEET

Fiber Pigtail LC/APC OS2 G657A2-colored set 2m - 12 pieces

Category	OS2 G657A2
Colour	DIN-Colorcode
Colour Code	VDE-0888
Connector Colour	green
Connector Conform to Standard	IEC61754-20
Core type	Semi tight
Fibre type	Single mode 9/125
Insertion loss 1310nm	< 0.25 dB
Length	2.0 m
Material outer sheath	LSZH
Max. Tension (long term)	3 N
Measurement protocol available	Yes
Minimaler Biegeradius Dynamic	20xOD mm
Min. Bending Radius Static	10xOD mm
Operating temperature	-20 – 60 °C
Outer diameter	0.9 mm
Packaging	Polybag
Quality class singlemode	B/1 acc. IEC 61753-021-2
Scope of delivery	1 Pigtail
Type	Conductor pigtail
Type of connector	LC/APC

Available variants

ArtNr.	Bezeichnung	Unique
FTTH-PIGTAIL-LCA12	Fiber Pigtail LC/APC OS2 G657A2-colored set 2m - 12 pieces	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-09-2026 . Technical changes reserved.

