
DATASHEET

Techly USB-C male 2.0 cable, 1m white







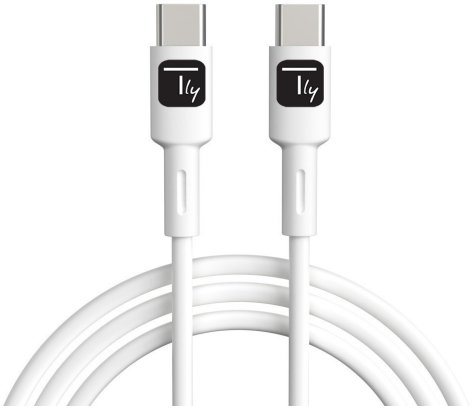

General data

USB-C™ male to USB-C™ male cable
Connect a USB-C™ device to another USB-C™ device
Supports speeds up to 480Mbps and fast charging up to 3.0A
Hi-Speed USB for ultra-fast transfers without data degradation
USB 2.0 standard; Tangle-free design; Colour: white

Charge a USB-C™ powered device such as a notebook, Macbook Pro® or tablet from a USB-C™ PD wall charger or power bank

Standards and Certifications
USB 2.0
Connectors
Two male USB-C™ connectors
Plated nickel
Connector cover in PVC
Cable:
Cable material: TPE
Connector cover material: ABS
Recharge up to 3A
Copper wires: 2*65 pcs*Φ0.1mm + 3*10 pcs*Φ0.1mm

This datasheet was created automatically on 22-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Techly USB-C male 2.0 cable, 1m white

Fast Charging Protocol: PD, FCP, QC 3.0/4.0, AFC
Fast charging: 3A 20V 60W (max output)

Technical properties	
Connection type connection 1	Plug
Connection type connection 2	Plug
Kink protection	True
Material Connector Housing	ABS
Material jacket	TPE
Number of poles connection 1	24
Number of poles connection 2	24
Speed	480 Mbit/s
Type of connector connection 1	USB Type-C
Type of connector connection 2	USB Type-C

Available variants

ArtNr.	Bezeichnung	Colour	Length
ICOC-MUSB20-C60W1	Techly USB-C male 2.0 cable, 1m white	white	1.0 m
ICOC-MUSB20-C60W2	Techly USB-C male 2.0 cable, 2m white	white	2.0 m

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de