
DATASHEET

Industrial Switch 4x 10/100/1000T, 1x 100/1000 SFP

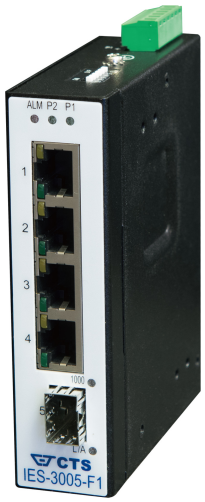

General data

Wide range of operation voltage 12 .. 58 V DC
Auto-MDI/MDI-X function
Dual Rate SFP Slot
Redundant power supply input
Temperature range -40°C .. +75°C
Rugged metal housing, EMV-secure, protection class IP30
DIN-Rail or wall mounting possible
Suitable DIN-Rail power supply: DR-15-24

Technical properties

Degree of protection	IP30
Depth	89.4 mm
Ethernet	True
Fast Ethernet	True
Gigabit Ethernet	True
Height	109.2 mm
Manufacturer	CTS
Mounting method	DIN rail (top hat rail)
Number of ports 10/100/1000 Mbps RJ45	4
Number of ports 100/1000 Mbps Mini GBIC	1
Operating Temperature	-40 – 75 °C
Width	29.1 mm

Available variants

This datasheet was created automatically on 02-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Industrial Switch 4x 10/100/1000T, 1x 100/1000 SFP

ArtNr.	Bezeichnung	Unique
IES-3005-F1	Industrial Switch 4x 10/100/1000T, 1x 100/1000 SFP	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION