
DATASHEET

L2 DIN-Rail-Switch 8x 100/1000T RJ45, 2x Combo 100/1000 RJ45/SFP

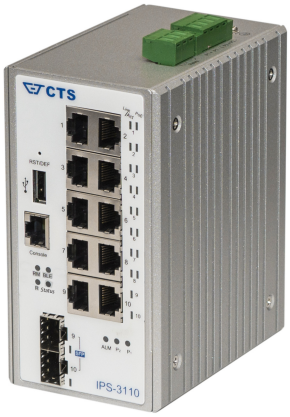

General data

8x RJ45 Ports + 2x Combo Ports
Management: SNMP, WEB, CLI
Features: IGMP, QOS, VLAN and much more
Dual Rate SFP Slot for 100-FX and 1000-BaseX
Wide range of operation voltage 9 .. 56 V DC
Auto-MDI/MDI-X function
Dual Rate SFP Slot
Redundant power supply input
Temperature range -40°C .. +75°C
Rugged metal housing, EMV-secure, protection class IP40
DIN-Rail or wall mounting possible
Suitable DIN-Rail power supply: DR-30-24

Technical properties

10 Gigabit Ethernet	False
Degree of protection	IP30
Depth	110.0 mm
Ethernet	True
Fast Ethernet	True
Gigabit Ethernet	True
Height	135.0 mm
Layer 2	True
Layer 3	False
Layer 4	False

This datasheet was created automatically on 08-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

L2 DIN-Rail-Switch 8x 100/1000T RJ45, 2x Combo 100/1000 RJ45/SFP

Layer 7	False
Manageable	True
Manufacturer	CTS
Mounting method	DIN rail (top hat rail)
Number of combination-ports RJ45/Mini GBIC	2
Number of ports 10/100/1000 Mbps RJ45	8
Power over Ethernet (PoE)	Other
Width	73.0 mm

Available variants

ArtNr.	Bezeichnung	Unique
IES-3110SFP	L2 DIN-Rail-Switch 8x 100/1000T RJ45, 2x Combo 100/1000 RJ45/SFP	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION