


DATASHEET

INFRALAN® adapter SC/APC Duplex OS2 green

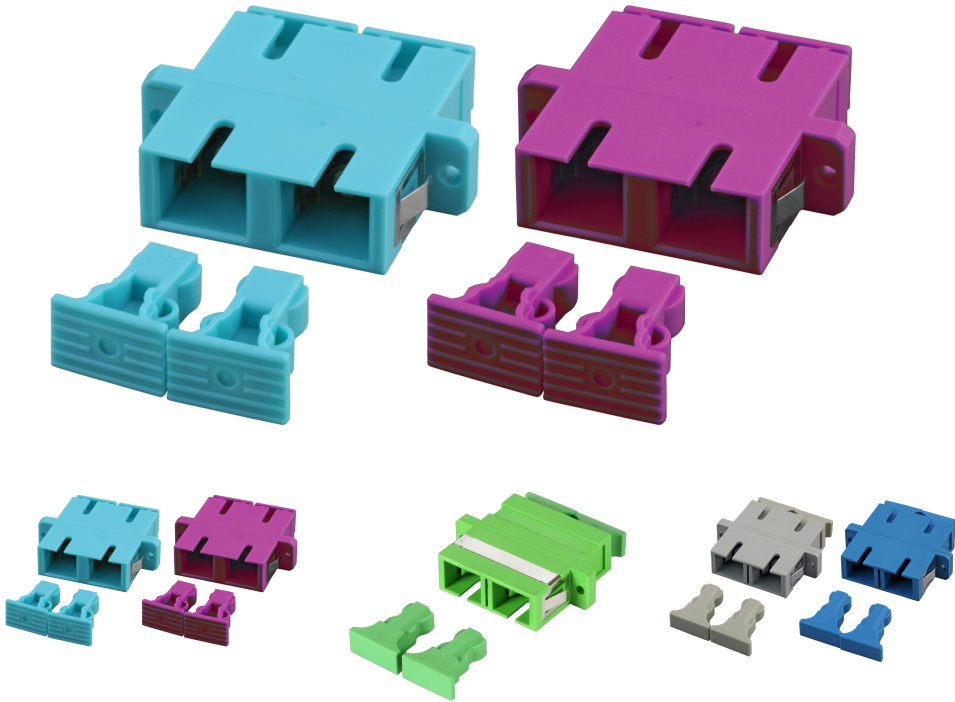

General data

The INFRALAN® SC Duplex adapter in a coloured plastic housing according to the fiber class
 Conform to DIN EN 61754-4
 Mounting options via clips or sheet metal screws ST2.5

Technical properties

Accessories	Self-Tapping Screw
Colour Dust Cover	Green
Conform to Standard	IEC61754-4
Construction type	SC-Duplex
Dust cover	True
Height	9.3 mm
Internal Shutter	False
Length	27.5 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-40 - 75 °C
Packaging	Polybag
Scope of deliveryLieferumfang	1 coupling, 2 screws

This datasheet was created automatically on 07-10-2026 . Technical changes reserved.



DATASHEET

INFRALAN® adapter SC/APC Duplex OS2 green

Storage Temperature	-40 – 85 °C
Type of connector connection 1	SC-Duplex
Type of connector connection 2	SC-Duplex
Type of fastening	Screw/snap in
Type of housing	With flange
Type of locking	Latching mechanism
Width	35.0 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Insertion loss 1310nm	Model	Suitable for type of fibre
IKL-SCDA-SM-K-GN	INFRALAN® adapter SC/APC Duplex OS2 green	OS2	Green	< 0,2 dB	SC/APC	Single mode

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 07-10-2026 . Technical changes reserved.

