


DATASHEET

INFRALAN® Distribution Panel 19" 24-Port, 1U, for Keystone Modul, RAL9005

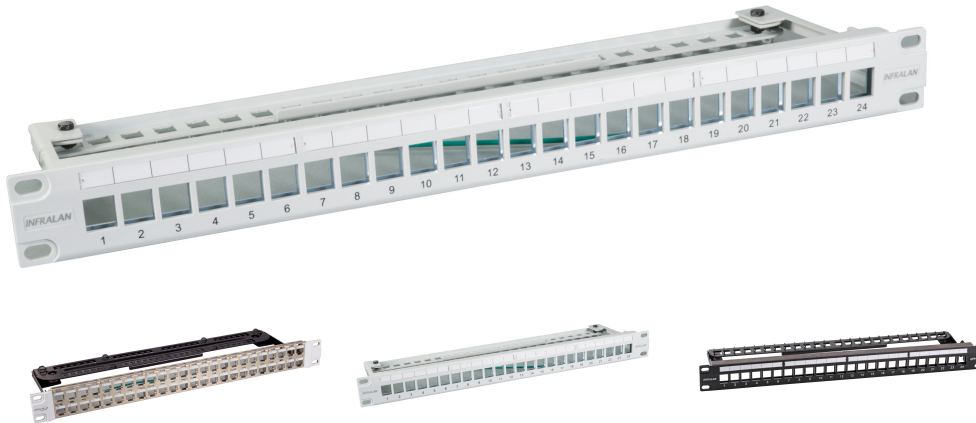

General data

For holding of modules in keystone format
Inclusive cable management
Labeling fields with transparent cover
Strain relief via cable tie
Delivery without modules

Technical properties

Depth	125.0 mm
EMC-version	False
Height	44.45 mm
Material	Metal
Number of height units	1 U
Temperature Range (Operation)	-10 - 60 °C
Type of plug-in connector system	Keystone
Width	482.6 mm
With buses/couplings	False

Available variants

ArtNr.	Bezeichnung	Colour	Number of connector holes	Suitable for adapter	Assembly	RAL number
IVF-24-GR	INFRALAN® Distribution Panel 19" 24-Port, 1U, for Keystone Modul, RAL7035	grey	24	Keystone	Without	7035
IVF-24-SW	INFRALAN® Distribution Panel 19" 24-Port, 1U, for Keystone Modul, RAL9005	black	24	Keystone	Without	9005

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.



DATASHEET

INFRALAN® Distribution Panel 19" 24-Port, 1U, for Keystone Modul, RAL9005

IVF-48-SI	INFRALAN® Distribution Panel 19" 48-Port, 1U, for Slimline Module, metal Colour	metallic	48	Keystone	Without	-
-----------	---	----------	----	----------	---------	---

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 17-09-2026 . Technical changes reserved.

