




## Product Description



WIR SORGEN FÜR VERBINDUNG  
WE CARE FOR CONNECTION

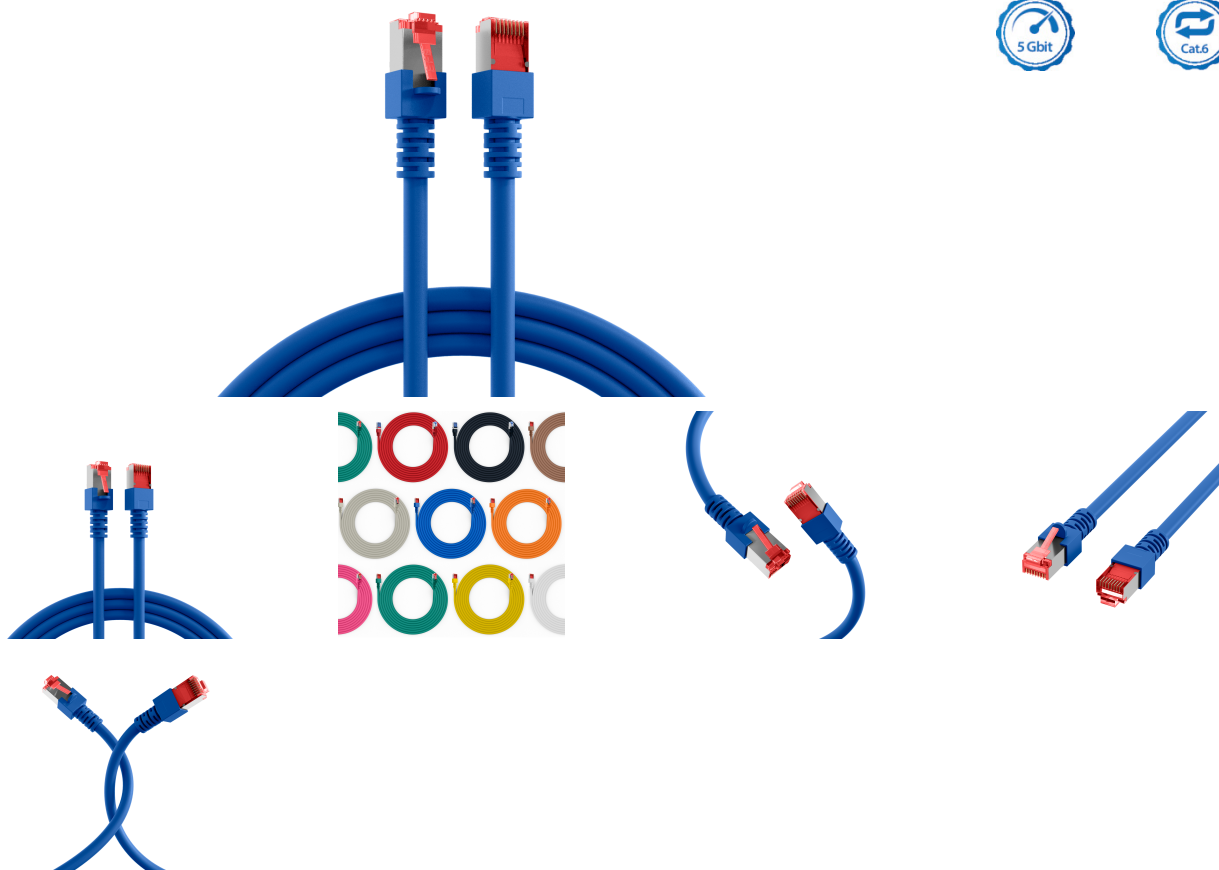

# DATASHEET

## RJ45 Patch Cord Cat.6 S/FTP LSZH blue 30m

The S/FTP LAN cable has double shielding, which effectively reduces electromagnetic interference. It can be used in a temperature range of -20 – 60 °C. The wide range of possible applications is supported by the bending radius of >31 mm. The patch cable has an IP20 rating. The LSZH jacket is halogen-free and low-smoke. In the event of a fire, it minimizes smoke development and increases indoor safety.

### Technical details

- Cat.6
- Connector: RJ45 8(8) to RJ45 8(8) with RJ45 connectors
- Shielding: S/FTP cable with 4x2 x AWG27/7
- Cable shape: round
- Pin assignment: 1:1 according to TIA/EIA 568B
- Equivalent to PoE class: PoE to IEEE802.3af, PoE+ to IEEE802.3at, and 4PPoE to IEEE802.3bt
- Gold-plated contacts
- Sheath: LSZH sheath material
- Outer diameter: 6.2 mm
- With an injected anti-kink grommet
- Fire protection: flame-retardant according to IEC60332-1, low-smoke according to IEC61034, halogen-free according to IEC60754-2
- Degree of protection: IP20
- With a punctual screen contact
- With locking lever protection
- Mating cycles: ≥750
- With length print
- Brand: EFB-Elektronik

### Technical properties

|                         |                         |
|-------------------------|-------------------------|
| AWG-size                | 27/7                    |
| Allocation              | acc. TIA/EIA 568B       |
| Anti-kink sleeve        | moulded-on              |
| Area of Application     | Industrial Ethernet     |
| Bandwidth               | 250MHz                  |
| Bending radius          | >31 mm                  |
| Cable construction      | 4x2                     |
| Cable shape             | rund                    |
| Cable type              | S/FTP                   |
| Cabling standard        | EN50173                 |
| Category                | 6                       |
| Colour anti-kink sleeve | blue                    |
| Colour outer sheath     | blue                    |
| Conductive shield       | Selected shield contact |
| Conductor Material      | Copper                  |
| Conductor resistance DC | 185 Ω/km                |

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.6 S/FTP LSZH blue 30m

|                                        |                                                                                                                                                                        |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connector                              | IEC 60603-7-5                                                                                                                                                          |
| Connector type                         | RJ45 standard                                                                                                                                                          |
| Contact Resistance                     | 30 mΩ                                                                                                                                                                  |
| Contacts                               | Gold plated                                                                                                                                                            |
| Current capacity                       | max. 1 A                                                                                                                                                               |
| Fire retardant version                 | acc. IEC60332-1                                                                                                                                                        |
| Halogen free                           | acc. IEC60754-2                                                                                                                                                        |
| Harmonised Standard                    | EN 50575                                                                                                                                                               |
| Impedance                              | 100                                                                                                                                                                    |
| Insulation Resistance                  | 10 MΩ                                                                                                                                                                  |
| Length imprint                         | True                                                                                                                                                                   |
| Locking lever                          | True                                                                                                                                                                   |
| Loop resistance                        | 370 Ω/km                                                                                                                                                               |
| Low smoke                              | acc. IEC61034                                                                                                                                                          |
| Material outer sheath                  | LSZH                                                                                                                                                                   |
| Mating cycles                          | ≥750                                                                                                                                                                   |
| Model                                  | shielded                                                                                                                                                               |
| Oil resistant                          | no                                                                                                                                                                     |
| Operating Temperature                  | -20 - 60 °C                                                                                                                                                            |
| Operating-/ tempering voltage          | max. 50 V DC                                                                                                                                                           |
| Outer diameter of the cable            | 6.2 mm                                                                                                                                                                 |
| Ozone resistance                       | No                                                                                                                                                                     |
| Pin assignment                         | 1:1                                                                                                                                                                    |
| Printing                               | Cat.6 S/FTP 4x2xAWG27/7 PIMF ISO/IEC 11801 & EN50173-1 TIA/EIA 568B.2-1 Halogen Free ***Gigabit***<br><a href="http://www.efb-elektronik.de">www.efb-elektronik.de</a> |
| Resistance unbalance                   | 5 %                                                                                                                                                                    |
| Resistant to chemicals                 | False                                                                                                                                                                  |
| Silicone-free                          | True                                                                                                                                                                   |
| Suitable for degree of protection (IP) | IP20                                                                                                                                                                   |
| Test voltage                           | 1000 (V DC, 1min) core/core und core/screen                                                                                                                            |
| Transmission                           | 5Gbit                                                                                                                                                                  |
| Type of connector connection 1         | RJ45 8(8)                                                                                                                                                              |
| Type of connector connection 2         | RJ45 8(8)                                                                                                                                                              |
| UL approbated                          | False                                                                                                                                                                  |
| UV resistant                           | Nein                                                                                                                                                                   |

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## RJ45 Patch Cord Cat.6 S/FTP LSZH blue 30m

### Available variants

| ArtNr.     | Bezeichnung                                 | Length POE class |                                                                           | Length tolerance |
|------------|---------------------------------------------|------------------|---------------------------------------------------------------------------|------------------|
| K5513.0,15 | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 0,15m | 0.15 m           | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.0,25 | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 0,25m | 0.25 m           | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.0,5  | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 0,5m  | 0.5 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.1    | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 1m    | 1.0 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.1,5  | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 1,5m  | 1.5 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.10   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 10m   | 10.0 m           | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.15   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 15m   | 15.0 m           | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at                           | ±5 %             |
| K5513.2    | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 2m    | 2.0 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.20   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 20m   | 20.0 m           | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at                           | ±5 %             |
| K5513.25   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 25m   | 25.0 m           | PoE acc. to IEEE802.3af                                                   | ±5 %             |
| K5513.3    | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 3m    | 3.0 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.30   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 30m   | 30.0 m           | PoE acc. to IEEE802.3af                                                   | ±5 %             |
| K5513.40   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 40m   | 40.0 m           | No                                                                        | ±5 %             |
| K5513.5    | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 5m    | 5.0 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |
| K5513.50   | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 50m   | 50.0 m           | No                                                                        | ±5 %             |
| K5513.7,5  | RJ45 Patch Cord Cat.6 S/FTP LSZH blue 7,5m  | 7.5 m            | PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt | ±5 %             |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

