
DATASHEET


RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,25m








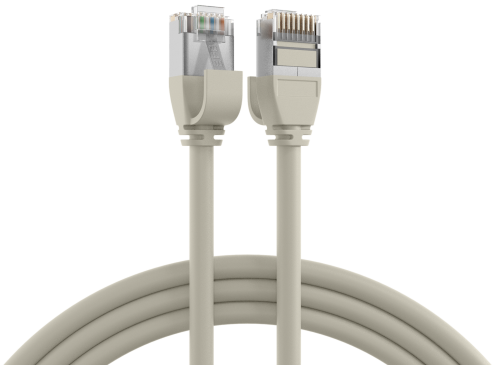







General data

This Cat.6A (TIA) patch cable from EFB-Elektronik supports data transmissions up to 10Gbit. U/FTP shielding reliably protects against interference and ensures high-quality signal. Since it is a Cat.6A (TIA) patch cable, it offers a frequency range of up to 500MHz, which provides high data transmission performance.

• Slim cable – the extra-thin cable construction with an outer diameter of 4.0 mm makes the Ethernet cable particularly suitable for areas with limited space or hard-to-reach areas.
• Cover fire protection requirements in compliance with standards – flame-retardant cable behaviour according to IEC60332-1 reduces the spread of fire in the event of a fault and supports compliance with common installation specifications.
• Power and connect end devices via one cable – reduces cabling effort because data and power are transmitted via PoE+ to IEEE802.3at on one line (fewer power adapters/sockets, faster installation).

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,25m

Product Description
This LAN cable offers enhanced pair-level interference resistance (U/FTP) – individually foil-shielded wire pairs reduce crosstalk, increase data security, and ensure stable high-speed transmission. It can be used in a temperature range of -20 – 75 °C. The wide range of possible applications is supported by the bending radius of >16 mm. The Ethernet cable has an IP20 rating. The TPE/LSZH jacket is flexible, halogen-free and low-smoke, making it ideal for safe and professional patch and server cabinet installations.

Technical details
• Cat.6A (TIA)
• Connector: RJ45 8(8) to RJ45 8(8) with extra-short RJ45 connectors
• Shielding: U/FTP cable with 4x2 x AWG30/7
• Cable shape: slim
• Pin assignment: 1:1 according to TIA/EIA 568B
• Corresponds to PoE class: PoE according to IEEE802.3af and PoE+ according to IEEE802.3at
• Gold-plated contacts
• Sheath: TPE/LSZH sheath material
• Outer diameter: 4.0 mm
• With an injected anti-kink grommet
• Fire protection: flame-retardant according to IEC60332-1, low-smoke according to IEC61034, halogen-free according to IEC60754-2
• Degree of protection: IP20
• With a punctual screen contact
• With locking lever protection
• Mating cycles: ≥750
• Brand: EFB-Elektronik

Technical properties	
AWG-size	30/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of Application	Industrial Ethernet
Bandwidth	500MHz
Bending radius	>16 mm
Cable construction	4x2
Cable shape	slim
Cable type	U/FTP
Cabling standard	EN50173
Category	6A (TIA)
Colour anti-kink sleeve	grey
Colour outer sheath	grey
Conductive shield	Selected shield contact

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,25m

Conductor Material	Copper
Conductor resistance DC	376 Ω/km
Connector	IEC 60603-7-51
Connector type	RJ45 short version
Contact Resistance	< 20 mΩ
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-1
Halogen free	acc. IEC60754-2
Harmonised Standard	EN 50575
Impedance	100 ±15 Ω
Insulation Resistance	100 MΩ
Length imprint	False
Locking lever	True
Loop resistance	752 Ω/km
Low smoke	acc. IEC61034
Material outer sheath	TPE/LSZH
Mating cycles	≥750
Model	shielded
NVP value	76 %
Oil resistant	no
Operating Temperature	-20 – 75 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	4.0 mm
Ozone resistance	No
Pin assignment	1:1
Printing	Cat.6A U/FTP ULTRAFLEX PATCHCABLE TPE ***10GE*** www.efb-elektronik.de
Resistance unbalance	< 4 %
Resistant to chemicals	False
Silicone-free	True
Suitable for degree of protection (IP)	IP20
Test voltage	1000 (V DC, 1min) core/core und core/screen
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,25m

UL approbated	False
UV resistant	Nein

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
K5547GR.0,15	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,15m	0.15 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5547GR.0,25	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5547GR.0,5	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5547GR.1	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at	±5 %
K5547GR.1,5	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 1,5m	1.5 m	PoE acc. to IEEE802.3af	±5 %
K5547GR.2	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 2m	2.0 m	PoE acc. to IEEE802.3af	±5 %
K5547GR.3	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 3m	3.0 m	PoE acc. to IEEE802.3af	±5 %
K5547GR.5	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex grey 5m	5.0 m	PoE acc. to IEEE802.3af	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION