
DATASHEET

RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 0,5m

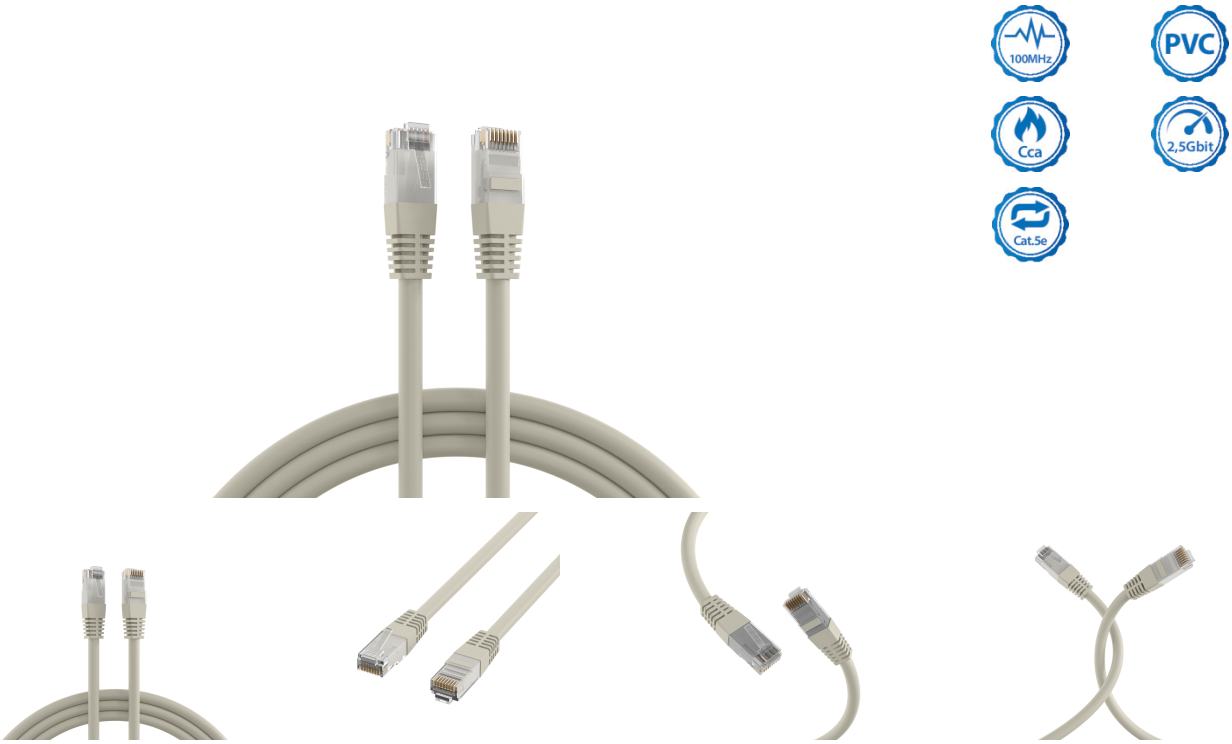

General data

This Cat.5e LAN cable from EFB-Elektronik supports 2.5Gbit. Because it is a Cat.5e Ethernet cable, it supports a frequency range of up to 100MHz.

• Cover fire protection requirements in compliance with standards – flame-retardant cable behaviour according to IEC60332-1 reduces the spread of fire in the event of a fault and supports compliance with common installation specifications.
• Ensure reliable 2.5 Gigabit connections – gold-plated contact surfaces reduce contact resistances and contact corrosion, which supports signal quality and thus stable 2.5 Gbps transmission.
• Reliable performance of 100MHz bandwidth ensures high-speed data transmission.

Product Description
The unshielded design in this U/UTP data cable enables cost-effective networking in low-interference environments while providing high flexibility for easy installation. The temperature range of the cable is -20 – 60 °C. The wide range of possible applications is supported by the bending radius of >27 mm. The patch cable has an IP20 rating. The polyvinyl chloride (PVC) jacket is a flexible standard jacket for network applications, without special fire protection properties.

Technical details
• Cat.5e
• Connector: RJ45 8(8) to RJ45 8(8) with RJ45 connectors

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 0,5m

- Shielding: U/UTP cable with 4x2 x AWG24/7
- Cable shape: round
- Pin assignment: 1:1 according to TIA/EIA 568B
- Gold-plated contacts
- Sheath: Polyvinyl chloride (PVC) sheath material
- Outer diameter: 5.4 mm
- With an injected anti-kink grommet
- Fire protection: flame-retardant according to IEC60332-1
- Degree of protection: IP20
- Mating cycles: ≥750
- With length print
- Brand: EFB-Elektronik

Technical properties	
AWG-size	24/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of Application	Industrial Ethernet
Bandwidth	100MHz
Bending radius	>27 mm
Cable construction	4x2
Cable shape	rund
Cable type	U/UTP
Cabling standard	EN50173
Category	5e
Colour anti-kink sleeve	grey
Colour outer sheath	grey
Conductive shield	No
Conductor Material	CCA
Connector	IEC 60603-7-2
Connector type	RJ45 standard
Contact Resistance	< 20 mΩ
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-1
Halogen free	False
Harmonised Standard	EN 50575
Impedance	100
Length imprint	True
Locking lever	False

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 0,5m

Material outer sheath	Polyvinylchlorid (PVC)
Mating cycles	≥750
Model	unshielded
Oil resistant	no
Operating Temperature	-20 – 60 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	5.4 mm
Ozone resistance	No
Pin assignment	1:1
Printing	U/UTP CAT.5E 100MHZ 24AWG×4P PATCH ISO/IEC 11801 & EN 50173 VERIFIED ***2,5 GIGABIT*** www.efb-elektronik.de
Resistant to chemicals	False
Silicone-free	True
Suitable for degree of protection (IP)	IP20
Test voltage	1000 (V DC, 1min) core/core und core/screen
Transmission	2.5Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
UL approbated	False
UV resistant	Nein

Available variants

ArtNr.	Bezeichnung	Length	POE class	Length tolerance
K8456.0,5	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 0,5m	0.5 m	No	±5 %
K8456.1	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 1m	1.0 m	No	±5 %
K8456.1,5	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 1,5m	1.5 m	No	±5 %
K8456.10	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 10m	10.0 m	No	±5 %
K8456.15	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 15m	15.0 m	No	±5 %
K8456.2	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 2m	2.0 m	No	±5 %
K8456.20	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 20m	20.0 m	No	±5 %
K8456.3	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 3m	3.0 m	No	±5 %
K8456.5	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 5m	5.0 m	No	±5 %
K8456.7,5	RJ45 Patch Cord Cat.5e U/UTP PVC CCA grey 7,5m	7.5 m	No	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION