



DATASHEET

Keystone Modul LC Duplex OS2 blau,

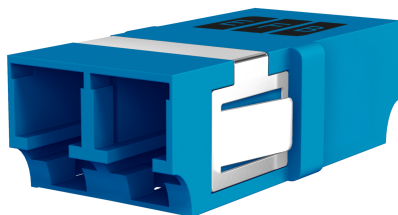

General data

LC duplex connectors in colored plastic housings with ceramic sleeves. Flangeless connectors allow for higher packing densities and can be used as Keystone modules in combination with the Keystone frame.

Technical properties

Conform to Standard	IEC61754-20
Construction type	SC-Simplex
Dust cover	True
Height	9.3 mm
Internal Shutter	False
Length	24 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-40 - 85 °C
Storage Temperature	-40 - 85 °C
Type of connector connection 1	LC-Duplex
Type of connector connection 2	LC-Duplex
Type of fastening	Engage (snap)

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.



DATASHEET

Keystone Modul LC Duplex OS2 blau,

Type of housing	flangeless
Width	14.7 mm

Available variants

ArtNr.	Bezeichnung	Unique
KM53515	Keystone Modul LC Duplex OS2 blau,	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.

