

DATASHEET

Keystone Modul LC/APC Duplex OS2 green





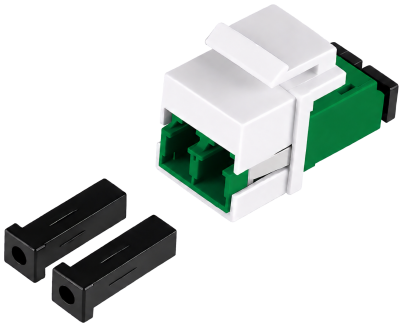





General data

The precisely manufactured LC/APC Duplex fibre optic keystone module from EFB-Elektronik is designed for OS2 applications. The plastic housing with ceramic sleeve and white dust cap is designed for reliable use in network, telecommunications and FTTH installations. The green version supports clear visual assignment in the installation environment.

• LC duplex connectors on both sides – Enable precise connection of compatible fibre links in suitable installation environments.
• Snap-in and latch attachment mode – Supports secure integration into suitable front panels and enclosures.
• Plastic housing with ceramic sleeve and dust cap – Ensures a robust and practical design in the installation environment.

The LC duplex design supports dual signal routing. The locking mechanism and the locking method enable secure integration into matching front panels and housings. The flangeless plastic housing with ceramic sleeve and white dust cap is designed for clean installation in the keystone environment. The green version facilitates visual identification. The design is specified as SC-Simplex.

Technical details
• Connector type Connector 1: LC Duplex
• Connector type Connector 2: LC Duplex
• Design: SC-Simplex

This datasheet was created automatically on 04-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Keystone Modul LC/APC Duplex OS2 green

- Mounting type: Snap-in
- Locking type: Latching Lock
- Housing design: flangeless
- Sleeve material: ceramic
- Housing material: plastic
- Colour dust cover: white
- Dust cap: Yes

Technical properties	
Colour Dust Cover	White
Conform to Standard	IEC61754-20
Construction type	SC-Simplex
Dust cover	True
Height	9.3 mm
Internal Shutter	False
Length	29.2 mm
Material housing	Plastic
Material sleeve	Ceramics
Operating temperature	-40 – 75 °C
Packaging	Polybag
Storage Temperature	-40 – 85 °C
Type of connector connection 1	LC-Duplex
Type of connector connection 2	LC-Duplex
Type of fastening	Engage (snap)
Type of housing	flangeless
Type of locking	Latching mechanism
Width	15.2 mm

Available variants

ArtNr.	Bezeichnung	Category	Colour	Model
KM53519	Keystone Modul LC/APC Duplex OS2 green	OS2	Green	LC/APC

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 04-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION