


DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 0,5m

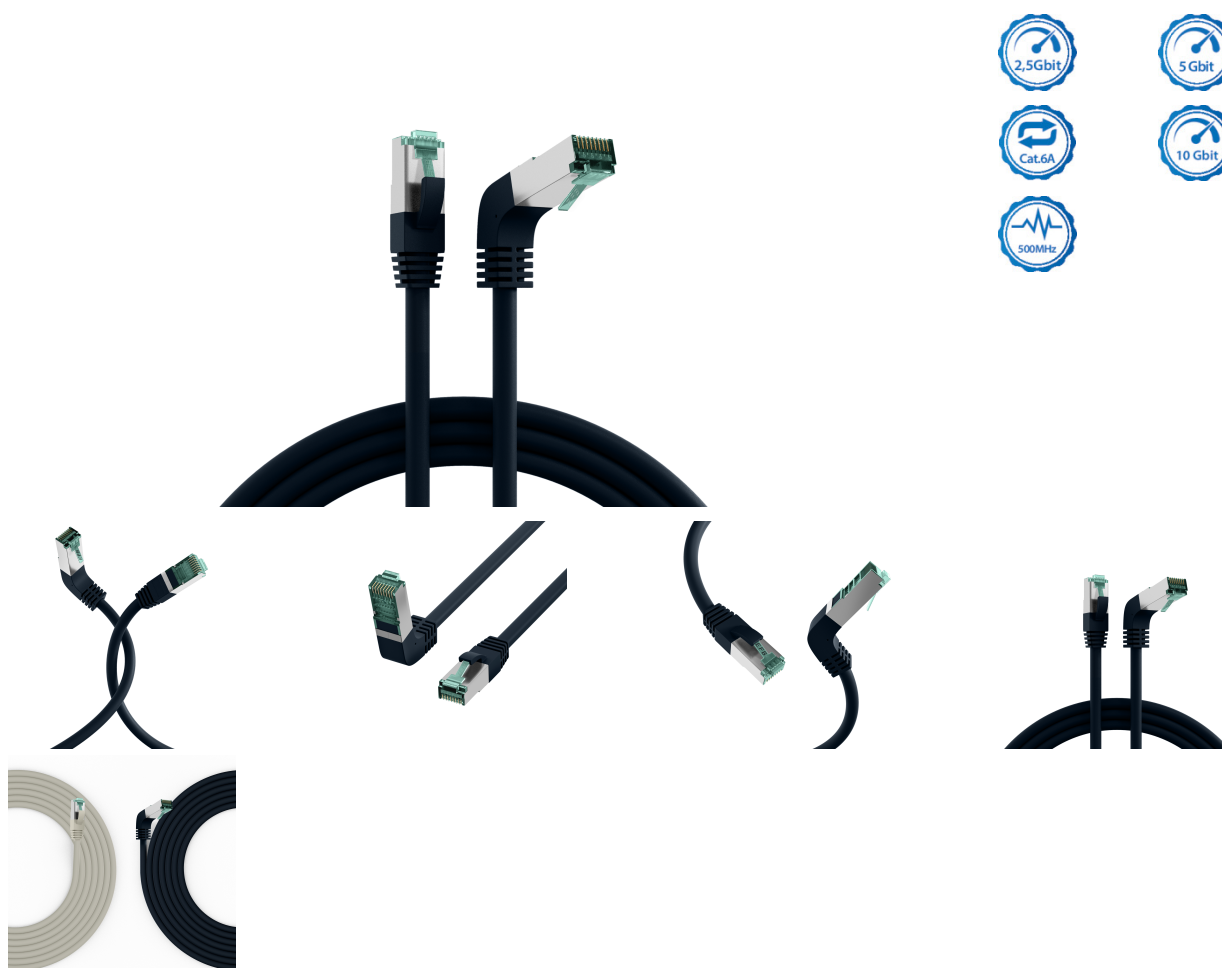

General data

RJ45 patch cable Cat.6A S/FTP LSZH 1x90°

The Cat.6A (TIA) patch cable has gold-plated contacts and enables 2.5Gbit, 5Gbit and 10Gbit Ethernet as a transmission standard.

Technical product properties

- Cat.6A (TIA)
- S/FTP cable with AWG27/7
- Jacket material made of halogen-free LSZH
- Fire protection: flame-retardant, halogen-free, low smoke
- Plug connection: RJ45 to RJ45
- With locking lever protection
- Has gold-plated contacts

The jacket of the shielded patch cable is made of halogen-free LSZH material and has a length imprint on the

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 0,5m

grommet. In addition, the cable offers the option of power supply via PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt.

The assignment of the blue RJ45 plugs is 1:1 and follows TIA/ EIA 568B. Suitable for the temperature range -20 – 60 °C.

The network cable has a conductor material made of copper and is ideal for applications in structured building cabling, industrial Ethernet and in data centers. The frequency range is 500 MHz.

Technical properties	
AWG-size	27/7
Allocation	acc. TIA/EIA 568B
Anti-kink sleeve	moulded-on
Area of Application	Industrial Ethernet
Bandwidth	500MHz
Bending radius	>30 mm
Cable construction	4x2
Cable shape	rund
Cable type	S/FTP
Cabling standard	EN50173
Category	6A (TIA)
Colour anti-kink sleeve	black
Colour outer sheath	black
Conductive shield	Selected shield contact
Conductor Material	Copper
Conductor resistance DC	185 Ω/km
Connector	IEC 60603-7-51
Connector type	RJ45 standard blue
Contact Resistance	30 mΩ
Contacts	Gold plated
Current capacity	max. 1 A
Fire retardant version	acc. IEC60332-1
Halogen free	acc. IEC60754-2
Harmonised Standard	EN 50575
Impedance	100 ±15 Ω
Length imprint	True
Locking lever	True
Loop resistance	370 Ω/km
Low smoke	acc. IEC61034
Material outer sheath	LSZH

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 0,5m

Mating cycles	≥750
Model	shielded
NVP value	74 %
Oil resistant	no
Operating Temperature	-20 - 60 °C
Operating-/ tempering voltage	max. 50 V DC
Outer diameter of the cable	6.0 mm
Ozone resistance	No
Pin assignment	1:1
Raw cable	Cat.6A
Resistant to chemicals	False
Suitable for degree of protection (IP)	IP20
Test voltage	1000 (V DC, 1min) core/core und core/screen
Transmission	10Gbit
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
UL approbated	False
UV resistant	Nein

Available variants

ArtNr.	Bezeichnung	Length POE class		Length tolerance
MK6001W.0,25B	RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 0,25m	0.25 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001W.0,5B	RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 0,5m	0.5 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001W.1B	RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 1m	1.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001W.2B	RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 2m	2.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001W.3B	RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 3m	3.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %
MK6001W.5B	RJ45 Patch Cord Cat.6A S/FTP LSZH 1x90° black 5m	5.0 m	PoE acc. to IEEE802.3af;PoE acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

