
DATASHEET

LAN Cat.7 1000 AWG23 S/FTP,4P, CPR Dca, orange, 500m

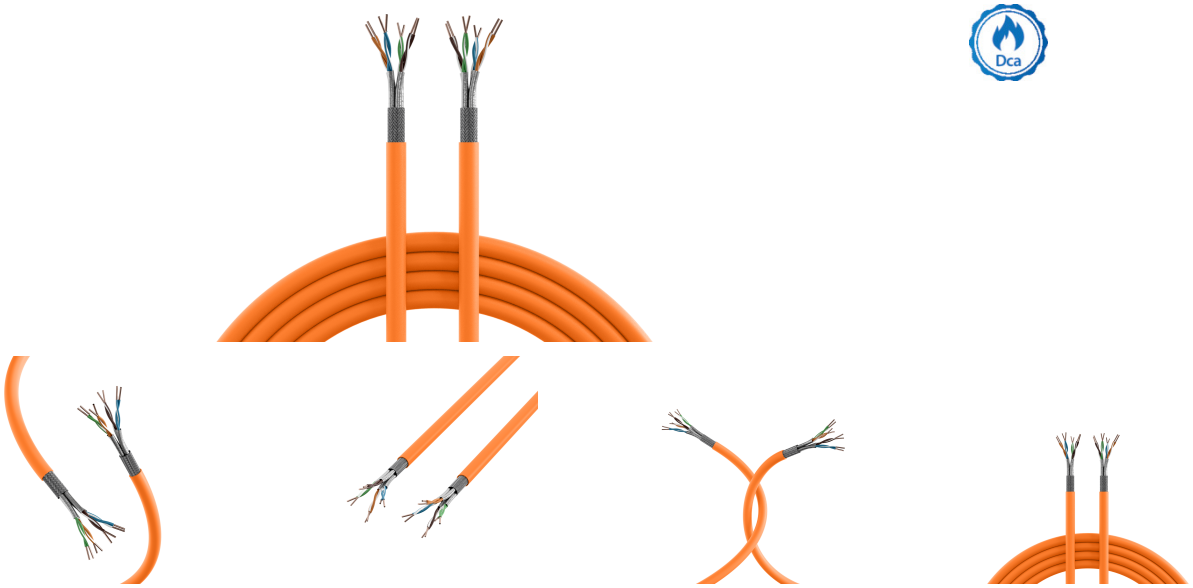

General data

The Cat.7 LAN installation cable from EFB-Elektronik in orange according to RAL 2003 is designed for high-performance network cabling. The S/FTP structure with LSZH jacket supports stable data connections up to 1000 MHz and is therefore suitable for modern installations with high bandwidth.

• 1000 MHz Cat.7 bandwidth – Supports IEEE 802.3 10Mbit to 10Gbit transmission standards and creates reserves for high-performance networks.
• S/FTP design with braid shielding – Reduces interference and supports stable signal quality in demanding cabling.
• LSZH sheath in orange with RAL 2003 and Euroclass Dca – Combines halogen-free material selection according to EN 60754 with a clearly recognizable colour scheme for structured installations.

The Cat.7 LAN installation cable from EFB-Elektronik is designed as a simplex and uses 23/1 conductors with 8 wires. The structure without reinforcement is aimed at fixed network installations and the dynamic bending radius of 60 mm makes installation easier. The braided shielding supports decoupling against external influences and the LSZH sheath meets the requirements for halogen-free design according to EN 60754. The cable is also intended for PoE according to IEEE802.3af, PoE+ according to IEEE802.3at and 4PPoE according to IEEE802.3bt and is therefore designed for versatile use in structured infrastructures.

Technical details
• Brand: EFB-Elektronik
• Category: 7

This datasheet was created automatically on 04-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

LAN Cat.7 1000 AWG23 S/FTP,4P, CPR Dca, orange, 500m

- Transmission standards: IEEE 802.3 10Mbit to 10Gbit
- Max. frequency: 1000 MHz
- Cable construction: S/FTP
- PoE: after IEEE802.3af PoE, after IEEE802.3at PoE+, after IEEE802.3bt 4PPoE
- AWG cross-section/number of wires: 23/1
- Number of cores: 8
- Type: simplex
- Sheath material: LSZH
- Sheath colour: orange
- RAL colour: RAL 2003
- Armour: without
- Bend radius (dynamic): 60 mm
- Directive/Regulation: RoHS 2011/65/UE
- Euroclass: Dca
- Halogen-free: according to EN 60754
- Shield over stranding: braid

Technical properties	
AWG-size	23/1
Armour	none
Bending radius (dynamic)	60 mm
Cable	IEC 61156-6
Cable silicone free	True
Cable structure	S/FTP
Cable type	EFB Cat.7 S/FTP 1000 AWG23 Dca
Cabling standards	ISO/IEC 11801
Category	7
Characteristic impedance	100 ± 5 Ohm
Conductor category	Class 1 = solid
Conductor material	Copper, tinned
Core identification	Colour
Core insulation	Foam-Skin-PE
Coupling attenuation	≥ 80 dB
Diameter conductor	0.56 mm
Directive/Regulation	RoHS 2011/65/UE
Euro class	Dca
Flame retardant	acc. to EN 60332-1
Halogen free	acc. to EN 60754
Harmonised Standard	EN 50575
Installation standard	EN 50174
Insulation resistance (500V)	≥ 2000 MOhm/km

This datasheet was created automatically on 04-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

LAN Cat.7 1000 AWG23 S/FTP,4P, CPR Dca, orange, 500m

Loop resistance	191.2 Ohm/km
Low smoke	acc. to EN 61034
Material outer sheath	LSZH
Max. Freuqency	MHz MHz
NVP value	76 %
Operating capacity	43 pF/km
Operating temperature, fix	-20 – 60 °C
Operating temperature, flexible	0 – 50 °C
Operating temperature, storage	-20 – 60 °C
PoE	acc. to IEEE802.3af PoE
Resistance unbalance	3 %
Screen over stranding	braiding
Screen over stranding element	Foil
Separation class acc. EN50174-2	D
Stranding element	Pairs
Test voltage DC, 1 min	1000 V
Transmission standards	IEEE 802.3 10Mbit bis 10Gbit
UV resistant	no

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	Number of cores	RAL colour	Type	Copper weight	Weight	Max. tractive force	Outer diameter approx.	Fire load
MK7101.1-CPR	LAN Cat.7 1000 AWG 23 S/FTP,4P, CPR Dca, orange	orange	1.0 m	8	RAL 2003	simplex	22 kg/km	58 kg/km	100 N	7.4 mm	590 MJ/km
MK7101.100-CPR	LAN Cat.7 1000 AWG23 S/FTP,4P, CPR Dca, orange, 100m	orange	100.0 m	8	RAL 2003	simplex	22 kg/km	58 kg/km	100 N	7.4 mm	590 MJ/km
MK7101.500-CPR	LAN Cat.7 1000 AWG23 S/FTP,4P, CPR Dca, orange, 500m	orange	500.0 m	8	RAL 2003	simplex	22 kg/km	58 kg/km	100 N	7.4 mm	590 MJ/km

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

regulatory requirements.

This datasheet was created automatically on 04-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION