
DATASHEET

MPO-PLUS®/APC(M)-LC Fanout cable OS2 12 Fibers,Typ B LSZH yellow 1m

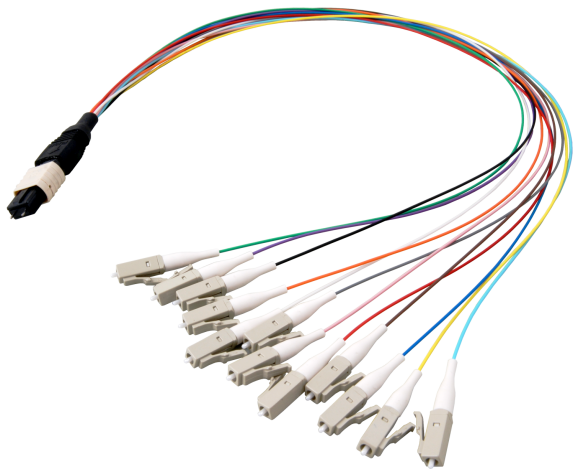

General data

Application:
Suitable for transmission distances up to 400 Gigabits.

Construction:
1 MPO-PLUS® female multi-fiber connector on one side,
12 LC-simplex connectors with 6 duplex clips (included) on the other side.
MPO single-mode connectors are in APC version.
MPO connector manufacturer: SENKO
MPO LowLoss version: IL max. 0.35 dB
LC version: IL max. 0.2 dB
Matrix: 12 fibers
Pigtail length: 50 cm
Cable diameter, multi-fiber connector: 3 mm
Cable diameter, single-fiber connector: 2 mm
Color: OM4, OM3, and OS2 according to color code DIN VDE 0888

Technical properties

Cable Diameter	0.9 mm
Category	OS2
Coding	Crossed
Colour outer sheath	yellow
Connector connection 1	MPO-PLUS®/APC(M)
Connector connection 2	LC
Crossed	Yes
Data rate	40G/ 100G/ 400G

This datasheet was created automatically on 03-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

MPO-PLUS®/APC(M)-LC Fanout cable OS2 12 Fibers,Typ B LSZH yellow 1m

Fibre type	OS2 9/125
Flame retardant	Yes
Guide pins side A	True
Guide pins side B	False
Halogen free (according to EN 50267-2-3)	True
Material outer sheath	LSZH
Operating temperature	-20 – 70 °C
Storage Temperature	-20 – 70
Wave length	1310/ 1550 nm
With rodent protection	False

Available variants

ArtNr.	Bezeichnung	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
MPOM12LCOS2-0,4	MPO-PLUS®/APC(M)-LC Fanout cable OS2 12 Fibers,Typ B LSZH yellow 0.4m	0.4 m	1 x MPO-PLUS®/APC(M)	12 x LC	12
MPOM12LCOS2-1	MPO-PLUS®/APC(M)-LC Fanout cable OS2 12 Fibers,Typ B LSZH yellow 1m	1 m	1 x MPO-PLUS®/APC(M)	12 x LC	12

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION