


# DATASHEET

## MTP®(F)-LC Trunk cable OM4 12 fibers Typ B LSZH erica-violet 1m

100 Gbit

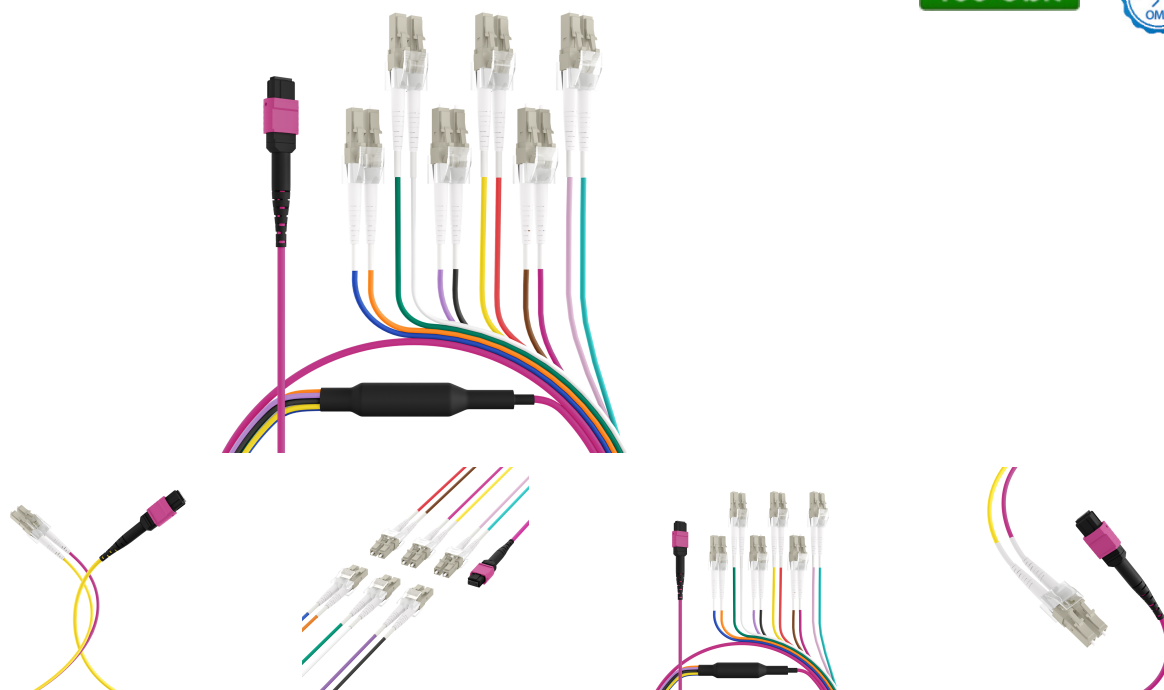

### General data

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® on one side,  
6 LC-Duplex connector on the other side

**LowLoss** version: attenuation per Fanout max. 0,35dB

Matrix: 12 fibers

Furcation length: 50cm

Cable diameter multi-connector: 3mm

Cable diameter single-connector: 2mm

Colour: OM5, OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

### Technical properties

|                        |              |
|------------------------|--------------|
| Cable Diameter         | 3.0 mm       |
| Category               | OM4          |
| Coding                 | Crossed      |
| Colour outer sheath    | erica-violet |
| Connector connection 1 | MTP®(F)      |
| Connector connection 2 | LC           |

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.



# DATASHEET

## MTP®(F)-LC Trunk cable OM4 12 fibers Typ B LSZH erica-violet 1m

|                                          |                 |
|------------------------------------------|-----------------|
| Crossed                                  | Yes             |
| Data rate                                | 40G/ 100G/ 400G |
| Fibre type                               | OM4 50/125      |
| Flame retardant                          | Yes             |
| Guide pins side A                        | False           |
| Guide pins side B                        | False           |
| Halogen free (according to EN 50267-2-3) | True            |
| Material outer sheath                    | LSZH            |
| Operating temperature                    | -20 - 70 °C     |
| Storage Temperature                      | -20 - 70 °C     |
| Wave length                              | 850/1300 nm     |
| With rodent protection                   | False           |

### Available variants

| ArtNr.         | Bezeichnung                                                            | Halogen free<br>(according to<br>EN 60754-1/2) | Length | Number of<br>connectors<br>connection 1 | Number of<br>connectors<br>connection 2 | Number<br>of fibres |
|----------------|------------------------------------------------------------------------|------------------------------------------------|--------|-----------------------------------------|-----------------------------------------|---------------------|
| MTPF12LCOM4-1  | MTP®(F)-LC Trunk cable<br>OM4 12 fibers Typ B LSZH<br>erica-violet 1m  | True                                           | 1.0 m  | 1 x MTP® (F)                            | 12 x LC                                 | 12                  |
| MTPF12LCOM4-10 | MTP®(F)-LC Trunk cable<br>OM4 12 fibers Typ B LSZH<br>erica-violet 10m | True                                           | 10.0 m | 1 x MTP® (F)                            | 12 x LC                                 | 12                  |
| MTPF12LCOM4-2  | MTP®(F)-LC Trunk cable<br>OM4 12 fibers Typ B LSZH<br>erica-violet 2m  | True                                           | 2.0 m  | 1 x MTP® (F)                            | 12 x LC                                 | 12                  |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 22-09-2026 . Technical changes reserved.

