


DATASHEET

MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m

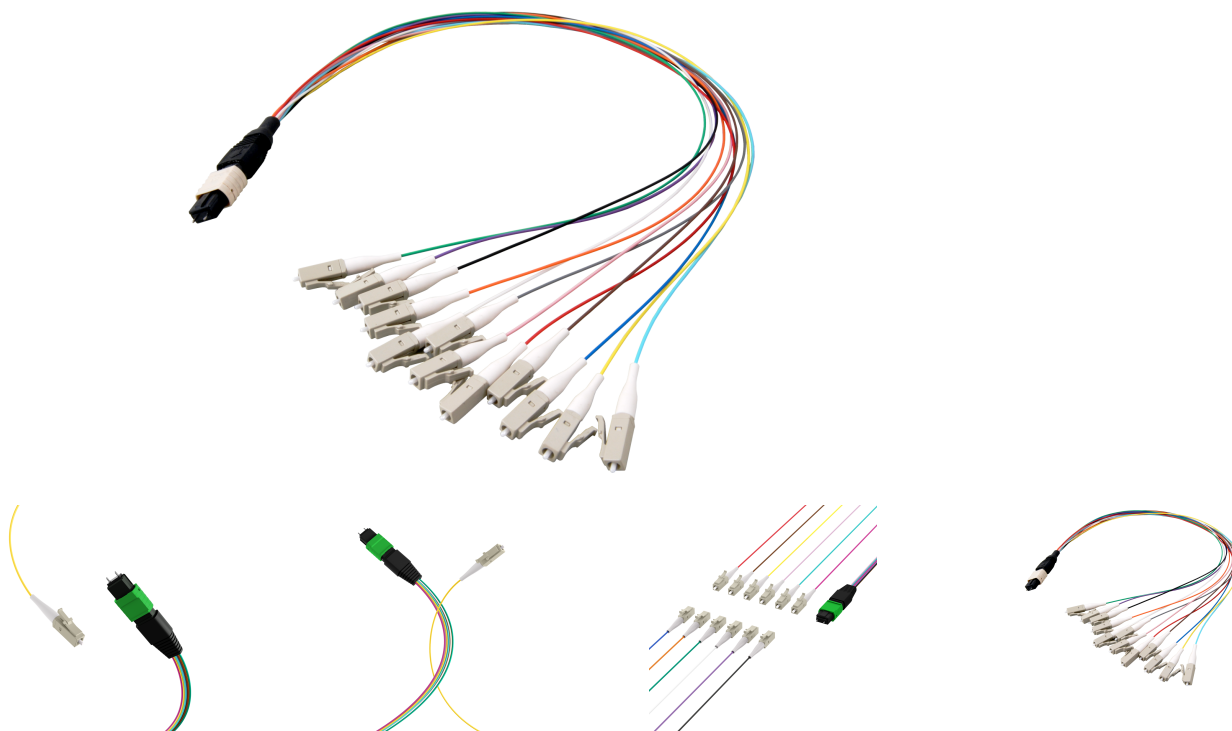

General data

Application: Suitable for transmission links up to **100 Gigabit**

Construction: 1 multi-connector MTP® on one side,
12 Single connector on the other side (e.g. LC)

LowLoss version: attenuation per Fanout max. 0,35dB

Matrix: 12 fibers

Cable diameter single-connector: 900µm

Colour: OM4, OM3 and OS2 acc. to colour code DIN VDE 0888

MTP Singlemode connectors are in APC version

Technical properties

Cable Diameter	0.9 mm
Category	OS2
Coding	Crossed
Colour outer sheath	yellow
Connector connection 1	MTP-M
Connector connection 2	LC/APC

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.



DATASHEET

MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m

Crossed	Yes
Data rate	40G/ 100G/ 400G
Fibre type	OS2 9/125
Flame retardant	Yes
Guide pins side A	True
Guide pins side B	False
Halogen free (according to EN 50267-2-3)	True
Material outer sheath	LSZH
Operating temperature	-20 - 70 °C
Wave length	1310/ 1550 nm
With rodent protection	False

Available variants

ArtNr.	Bezeichnung	Halogen free (according to EN 60754-1/2)	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
MTPM12LCAPC-1	MTP®/APC(M)-LC/APC Fanout cable OS2 12 fibers Typ B LSZH yellow 1m	True	1.0 m	1 x MTP®/APC (M)	12 x LC/APC	12

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 19-09-2026 . Technical changes reserved.

