


# DATASHEET

## Duplex Patchcable SC-SC OM4 1m LSZH 1,2mm heatherviolet

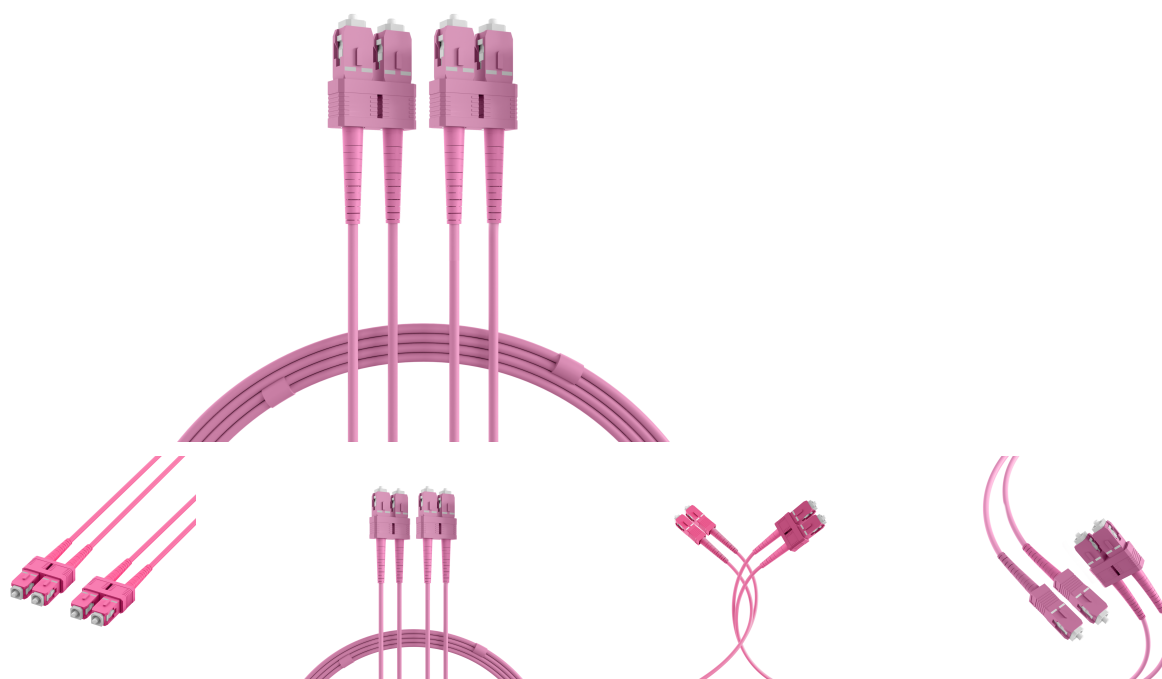

### General data

The 1.2 mm Duplex Jumper are characterized due to the small outer diameter. This is an advantage for the installers when they have limited space for cable management. The small outer diameter is also useful in projects with high density areas.

### Characteristics

Space-saving installation due to the small outer diameter

Halogen free and flame retardant according to IEC-60754-2, IEC-60332-1 and IEC-61034

Connector in colour of category (OM4 is erica-violet)

EFB fiber connectors meet the quality class Grade B/2 for multimode according to IEC-61753-122-2 (Draft)

pre-coded

100% tested and with individuell measuring protocol

### Technical properties

|                      |           |
|----------------------|-----------|
| Anti-kink sleeve     | put-on    |
| Bend optimized fiber | no        |
| Cable structure      | Duplex    |
| Cable type           | I-V(ZN) H |
| Cable Ø              | 1.2 mm    |

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## Duplex Patchcable SC-SC OM4 1m LSZH 1,2mm heatherviolet

|                                |                                                                            |
|--------------------------------|----------------------------------------------------------------------------|
| Category                       | OM4                                                                        |
| Colour outer sheath            | erica-violet                                                               |
| Fibre type                     | Multi mode 50/125                                                          |
| Flame retardant                | acc. to IEC 60332-1-2                                                      |
| Halogen free                   | acc. to IEC 62821                                                          |
| Insertion loss 850nm           | ≤0,25 dB                                                                   |
| Low smoke                      | acc. to IEC 61034                                                          |
| Material outer sheath          | LSZH                                                                       |
| Min. Bending radius (Dynamic)  | 20xOD mm                                                                   |
| Min. Bending radius (Static)   | 10xOD mm                                                                   |
| Number of fibres               | 2                                                                          |
| Operating Temperature          | -20 - 60 °C                                                                |
| Packaging                      | EFB-Electronics poly bag (resealable)                                      |
| Reinforcement                  | Aramid                                                                     |
| Return loss 850nm              | ≥35 dB                                                                     |
| Scope of delivery              | 1x Patchcable, 2x Duplex Clip, 1x Measurement Report, 1x Information Sheet |
| Storage Temperature            | -20 - 70 °C                                                                |
| Type of connector connection 1 | SC                                                                         |
| Type of connector connection 2 | SC                                                                         |

### Available variants

| ArtNr.       | Bezeichnung                                              | Length Length tolerance |      |
|--------------|----------------------------------------------------------|-------------------------|------|
| 00318.1-1.2  | Duplex Patchcable SC-SC OM4 1m LSZH 1,2mm heatherviolet  | 1.0 m                   | ±5 % |
| 00318.10-1.2 | Duplex Patchcable SC-SC OM4 10m LSZH 1,2mm heatherviolet | 10.0 m                  | ±5 % |
| 00318.2-1.2  | Duplex Patchcable SC-SC OM4 2m LSZH 1,2mm heatherviolet  | 2.0 m                   | ±5 % |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

