
DATASHEET

Duplex Patchcable LC-LC OM5 7,5m LSZH 2mm limegreen

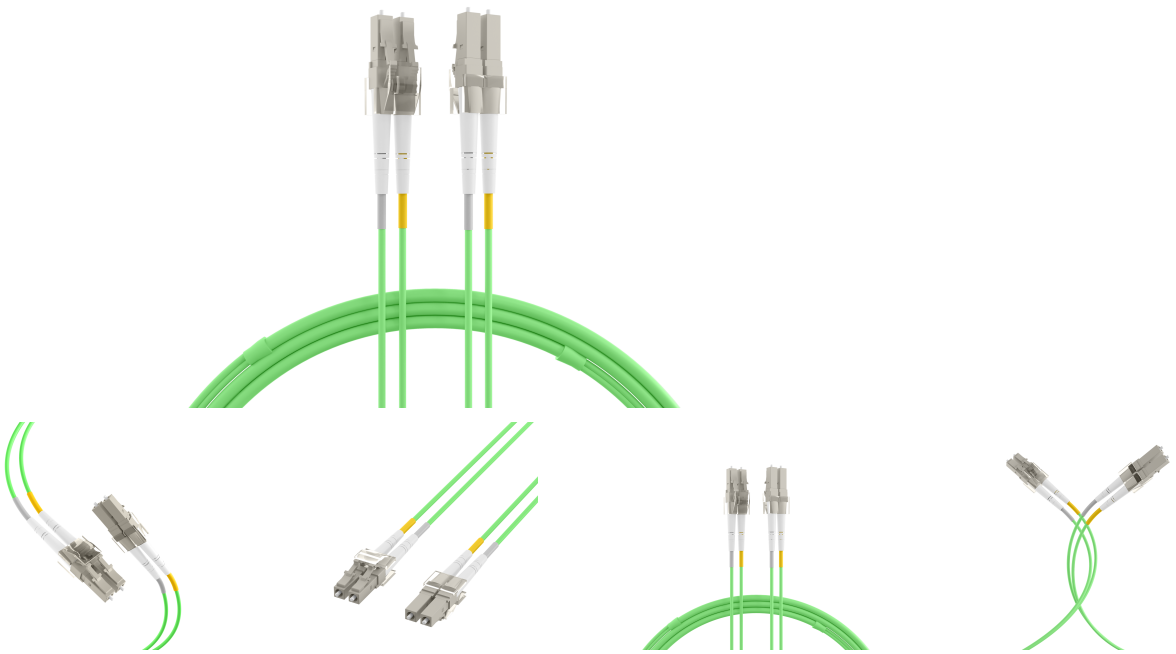

General data

Fiber jumper are well defined components in international standard of structured cabling ISO/IEC11801.
Due to many different network protocols created in the last 25 years , also a wide range of connectors had been developed. Some of them are still important today: LC, SC, E2000®, MPO/MTP.

Fiber jumper (patchcord) are defined as shortest connection between passive interface and active deviceport, regarding structured cabling standard. Rating of performance, known as category, as well as performance of total transmission channel, known as link class,Similar descriptions for patchcords: Connection cable, drop cable, adapter cable, interconnecting cord, Jumper

Features of EFB fiber optic patch cables
Tension relief reinforced with aramid yarn
Halogen-free and flame-retardant sheath according to IEC-60754-2, IEC-60332-1 and IEC-61034
EFB fiber optic connectors meet the minimum quality class Grade B/2 according to IEC-61753-1 for singlemode and Grade B/2 for multimode according to IEC 61753-122-2 (UPC cut)
100% tested and with individual measurement report

Technical properties

Anti-kink sleeve	put-on
Bend optimized fiber	no
Cable structure	Duplex

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Duplex Patchcable LC-LC OM5 7,5m LSZH 2mm limegreen

Cable type	I-V(ZN) H
Cable Ø	2 mm
Category	OM5
Colour outer sheath	lime green
Fibre type	Multi mode 50/125
Flame retardant	acc. to IEC 60332-1-2
Halogen free	acc. to IEC 62821
Insertion loss 850nm	≤0,25 dB
Low smoke	acc. to IEC 61034
Material outer sheath	LSZH
Min. Bending radius (Dynamic)	20xOD mm
Min. Bending radius (Static)	10xOD mm
Number of fibres	2
Operating Temperature	-20 – 60 °C
Packaging	EFB-Electronics poly bag (resealable)
Reinforcment	Aramid
Return loss 850nm	≥35 dB
Scope of delivery	1x Patchcable, 2x Duplex Clip, 1x Measurement Report, 1x Information Sheet
Storage Temperature	-20 – 70 °C
Type of connector connection 1	LC
Type of connector connection 2	LC

Available variants

ArtNr.	Bezeichnung	Length	Length tolerance
O0319.0,5OM5	Duplex Patchcable LC-LC OM5 0,5m LSZH 2mm limegreen	0.5 m	±5 %
O0319.1,5OM5	Duplex Patchcable LC-LC OM5 1,5m LSZH 2mm limegreen	1.5 m	±5 %
O0319.10OM5	Duplex Patchcable LC-LC OM5 10m LSZH 2mm limegreen	10.0 m	±5 %
O0319.15OM5	Duplex Patchcable LC-LC OM5 15m LSZH 2mm limegreen	15.0 m	±5 %
O0319.1OM5	Duplex Patchcable LC-LC OM5 1m LSZH 2mm limegreen	1.0 m	±5 %
O0319.20OM5	Duplex Patchcable LC-LC OM5 20m LSZH 2mm limegreen	20.0 m	±5 %
O0319.25OM5	Duplex Patchcable LC-LC OM5 25m LSZH 2mm limegreen	25.0 m	±5 %
O0319.2OM5	Duplex Patchcable LC-LC OM5 2m LSZH 2mm limegreen	2.0 m	±5 %
O0319.30OM5	Duplex Patchcable LC-LC OM5 30m LSZH 2mm limegreen	30.0 m	±5 %
O0319.35OM5	Duplex Patchcable LC-LC OM5 35m LSZH 2mm limegreen	35.0 m	±5 %
O0319.3OM5	Duplex Patchcable LC-LC OM5 3m LSZH 2mm limegreen	3.0 m	±5 %
O0319.50OM5	Duplex Patchcable LC-LC OM5 50m LSZH 2mm limegreen	50.0 m	±5 %
O0319.5OM5	Duplex Patchcable LC-LC OM5 5m LSZH 2mm limegreen	5.0 m	±5 %

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Duplex Patchcable LC-LC OM5 7,5m LSZH 2mm limegreen

O0319.7,5OM5	Duplex Patchcable LC-LC OM5 7,5m LSZH 2mm limegreen	7.5 m	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION