
DATASHEET

R&M Pigtail E2000™/APC OS2 G652D yellow 2m - 1 pc

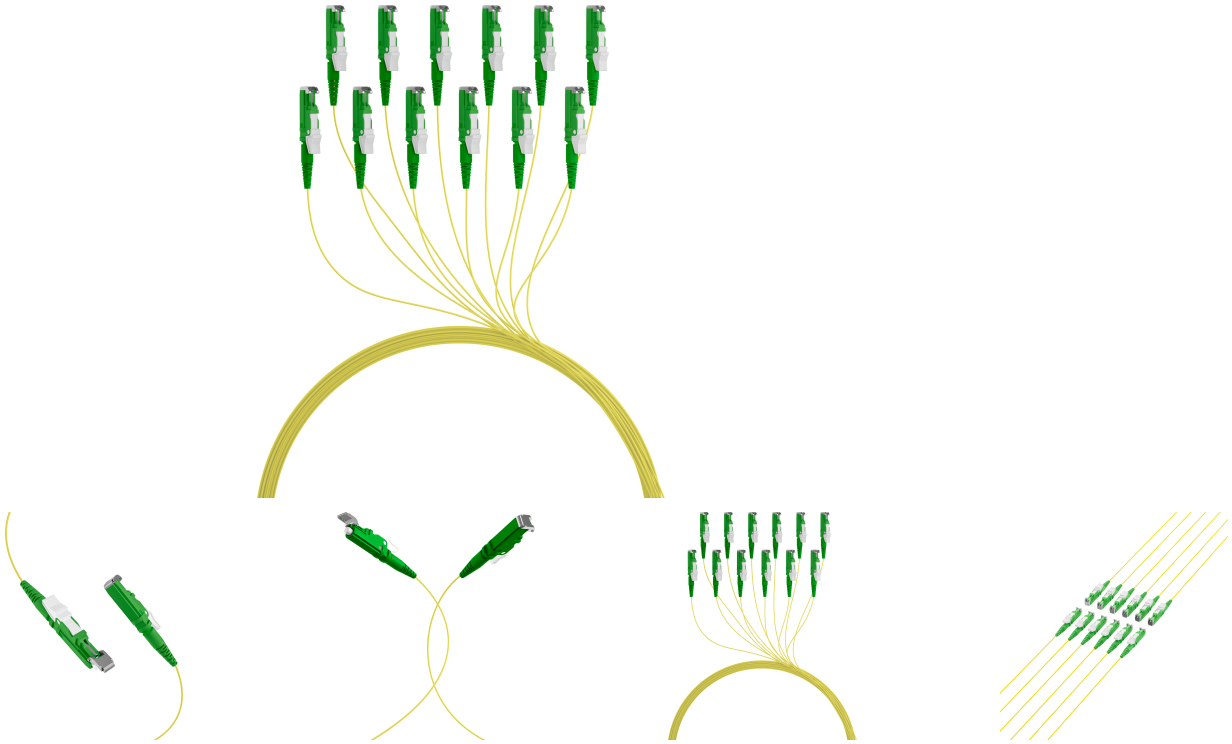

General data

The fibre pigtail E2000®/APC OS2 G652D from EFB-Elektronik is designed for professional fibre optic splice connections in single-mode fibre optic networks. The version as a 2.0 m long single pigtail in yellow, monochrome marking is intended for standard-compliant use in the installation environment.

• Single-mode 9/125 in the OS2 G652D category – Supports use in professional fibre optic splice connections with clear mapping to the single-mode infrastructure.
• E2000®/APC connector according to IEC61754-15 – Ensures a standard-compliant interface and clear identification by the green connector colour.
• 2.0 m compact tube with 900 µm buffer and attached strain-relief boot grommet – facilitates processing in the splice area and reliably protects the fibre transition.

Technically, it is a wire pigtail with an outer diameter of 0.9 mm and a buffer of 900 µm. The single-mode version in the OS2 G652D category is specified in quality class C/1 according to IEC 61753-021-2. The E2000®/APC connector corresponds to IEC61754-15 and is green. The monochrome yellow marking supports the assignment. An attached strain-relief boot grommet is provided and the test report can be accessed via QR code.

Technical details
• Type: fibre pigtail
• Fibre construction: tight-buffered fibre
• Connector type: E2000®/APC

This datasheet was created automatically on 05-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

R&M Pigtail E2000™/APC OS2 G652D yellow 2m - 1 pc

- Fibre type: Single-mode 9/125
- Category: OS2 G652D
- Single-mode quality class: C/1 according to IEC 61753-021-2
- Length: 2.0 m
- Outer diameter: 0.9 mm
- Buffer: 900 µm
- Colour: yellow
- Colour code: solid colour
- Connector colour: green
- Connector standard: IEC61754-15
- With fitted strain-relief boot
- Test report: available via QR code
- Scope of delivery: 1 pigtail

Technical properties	
Anti-kink sleeve	put-on
Bend optimized fiber	no
Buffer	900µm
Category	OS2 G652D
Colour	yellow
Colour Code	one colour
Connector Colour	green
Connector Conform to Standard	IEC61754-15
Core type	Semi tight
Fibre type	Singlemode 9/125
Insertion loss 1310nm	< 0.35 dB
Length	2.0 m
Material outer sheath	LSZH
Max. Tension (long term)	3 N
Measurement protocol available	No, QR code for demand
Minimaler Biegeradius Dynamic	20xOD
Mion. Bending Radius Static	10xOD
Operating temperature	-20 – 60 °C
Outer diameter	0.9 mm
Packaging	Polybag
Quality class singlemode	C/1 acc. IEC 61753-021-2
Scope of delivery	1 Pigtail
Type	Conductor pigtail
Type of connector	E2000®/APC

This datasheet was created automatically on 05-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

R&M Pigtail E2000™/APC OS2 G652D yellow 2m - 1 pc

Available variants

ArtNr.	Bezeichnung	Unique
O0770.2	R&M Pigtail E2000™/APC OS2 G652D yellow 2m - 1 pc	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION