


DATASHEET

Fiber Pigtail E2000® OM1 -Blue 2m - 1 piece

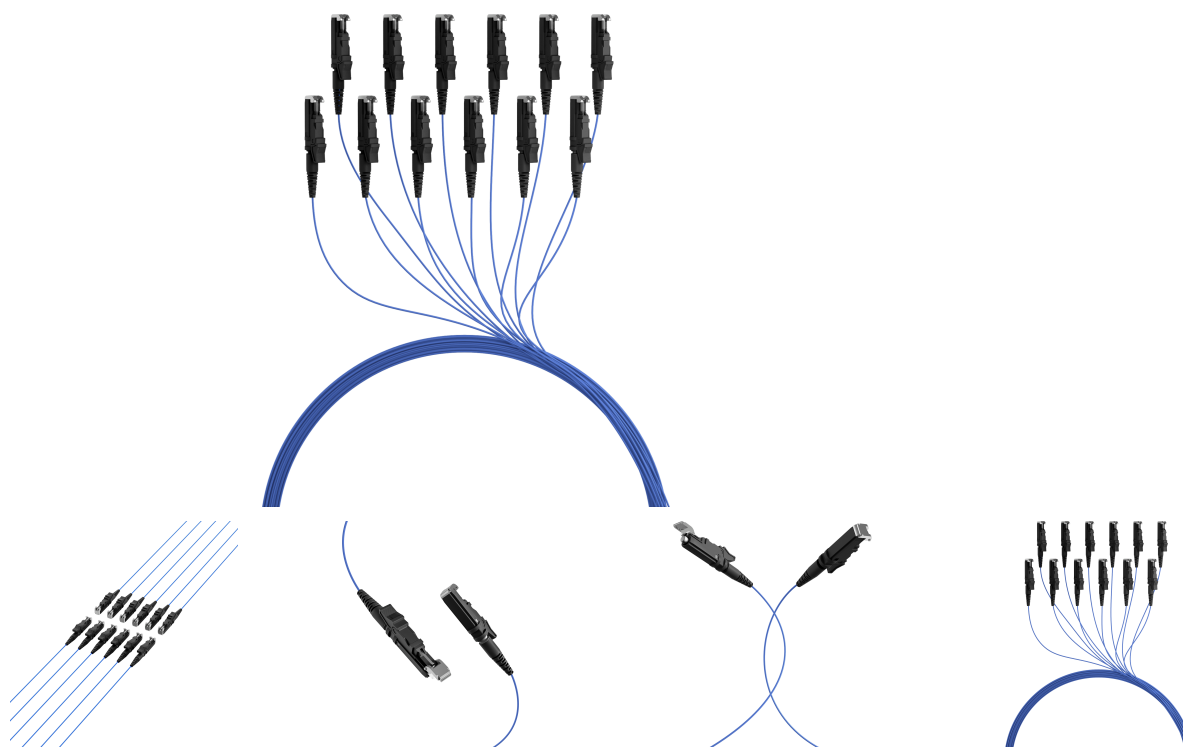

General data

The E2000® fibre pigtail has a primary coating (900µm) in the colour of the respective category (see table). The colour of the primary coating is equal to the colour of the secondary coating. **The pigtails can be ordered separately.** Because the standard batch size for ordering pigtails is 12, in a polybag are 12 pigtails. Every PU contains an individual measuring protocol.

Technical properties

APC-version	False
Anti-kink sleeve	put-on
Bend optimized fiber	no
Buffer	900µm
Category	OM1
Colour	blue
Colour Code	one colour
Connector Colour	black
Connector Conform to Standard	IEC61754-15
Core type	Semi tight
Fibre type	Multimode 62,5/125
Insertion loss 850nm	< 0.35 dB

This datasheet was created automatically on 13-09-2026 . Technical changes reserved.

DATASHEET

Fiber Pigtail E2000® OM1 -Blue 2m - 1 piece

Length	2.0 m
Material outer sheath	LSZH
Max. Tension (long term)	3 N
Measurement protocol available	Yes
Minimaler Biegeradius Dynamic	20xOD
Mion. Bending Radius Static	10xOD
Operating temperature	-20 - 60 °C
Outer diameter	0.9 mm
Packaging	Polybag
Quality class Multimode	C/2 acc. IEC 61753-022-2
Scope of delivery	1 Pigtail
Type	Conductor pigtail
Type of connector	E2000®

Available variants

ArtNr.	Bezeichnung	Unique
00799.2	Fiber Pigtail E2000® OM1 -Blue 2m - 1 piece	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 13-09-2026 . Technical changes reserved.

