


DATASHEET

Fiber Pigtail LC OM3 -Aqua 2m - 1 piece

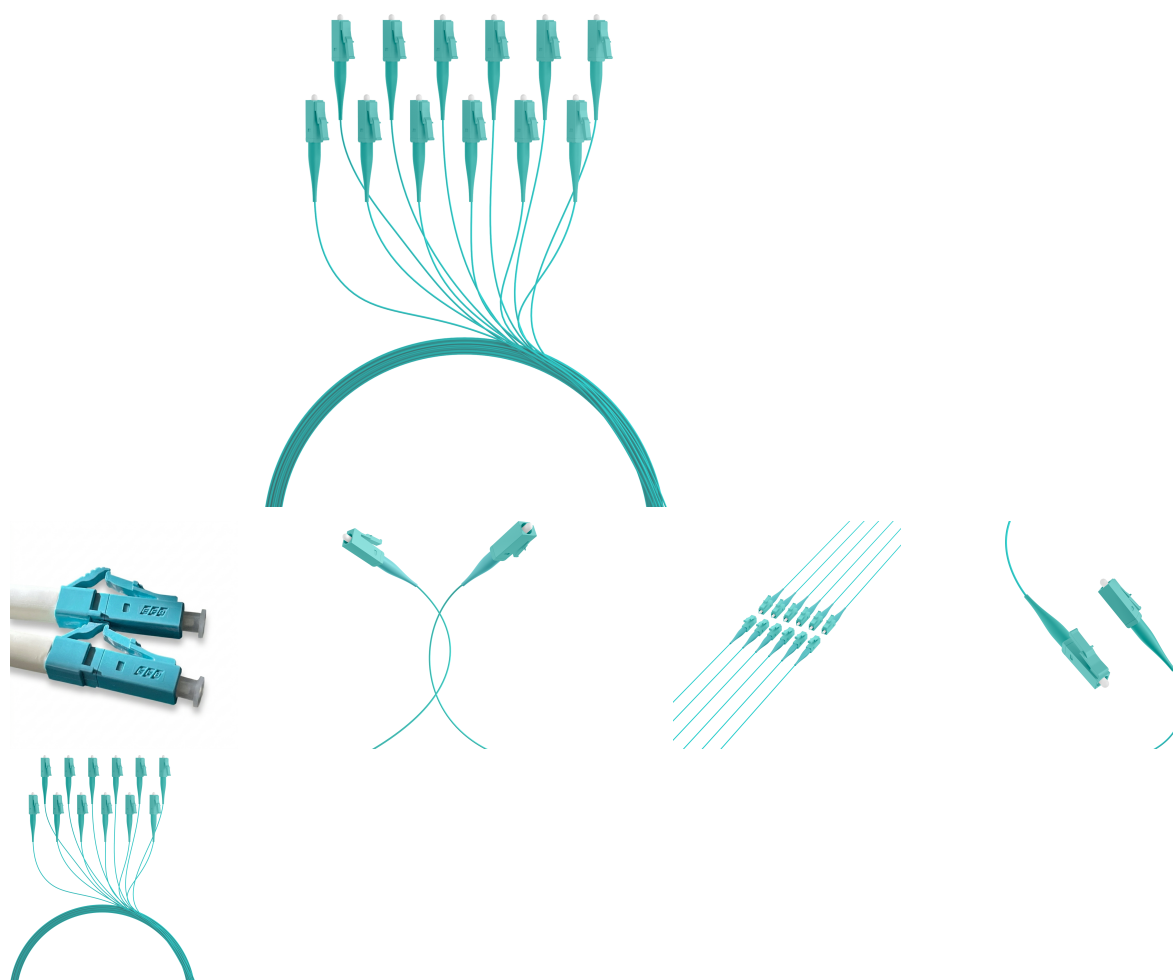

General data

The LC OM3 aqua wire pigtail from EFB-Elektronik is designed for professional fibre optic splice connections in multimode fibre optic networks. The 2.0 m long single pigtail is intended for standard-compliant use in the installation environment.

- Multimode 50/125 in OM3 category – Supports use in professional fibre optic splice connections and clearly assigns the pigtail to multimode cabling.
- LC connector according to IEC61754-20 – Ensures a standard-compliant interface and clear identification through the aqua-coloured design.
- 2.0 m compact tube with 0.9 mm outer diameter, loose buffer and attached strain-relief boot – Facilitates processing in the splice area and protects the fibre transition.

Technically, it is a wire pigtail with an outer diameter of 0.9 mm and a loose buffer. The multimode version in the OM3 category with fibre type Multimode 50/125 is specified according to IEC60793-2. The LC connector corresponds to

This datasheet was created automatically on 20-10-2026 . Technical changes reserved.

DATASHEET

Fiber Pigtail LC OM3 -Aqua 2m - 1 piece

IEC61754-20 and is designed in aqua. The single-colour marking supports the assignment. The quality class is B/2 according to IEC 61753 / IEC 61755. An attached strain-relief boot grommet is provided and a test report is available.

Technical details

- Type: fibre pigtail
- Fibre construction: tight-buffered fibre
- Connector type: LC
- Fibre type: Multimode 50/125
- Category: OM3
- Multimode quality class: B/2 according to IEC 61753 / IEC 61755
- Length: 2.0 m
- Outer diameter: 0.9 mm
- Buffer: loose
- Colour: aqua
- Colour code: solid colour
- Connector colour: aqua
- Connector standard: IEC61754-20
- Cable standard: IEC60793-2
- With fitted strain-relief boot
- Test report available: Yes
- Scope of delivery: 1 pigtail

Technical properties

Anti-kink sleeve	put-on
Bend optimized fiber	no
Buffer	loose
Cable Conform to Standard	IEC60793-2
Category	OM3
Colour	aqua
Colour Code	one colour
Connector Colour	aqua
Connector Conform to Standard	IEC61754-20
Core type	Semi tight
Fibre type	Multi mode 50/125
Insertion loss 850nm	< 0.3 dB
Length	2.0 m
Material outer sheath	LSZH
Max. Tension (long term)	3 N
Measurement protocol available	Yes
Minimaler Biegeradius Dynamic	20xOD
Mion. Bending Radius Static	10xOD
Operating temperature	-20 - 70 °C

This datasheet was created automatically on 20-10-2026 . Technical changes reserved.



DATASHEET

Fiber Pigtail LC OM3 -Aqua 2m - 1 piece

Outer diameter	0.9 mm
Packaging	Polybag
Quality class Multimode	B/2 acc. IEC 61753 / IEC 61755
Scope of delivery	1 Pigtail
Type	Conductor pigtail
Type of connector	LC

Available variants

ArtNr.	Bezeichnung	Unique
O3681.2	Fiber Pigtail LC OM3 -Aqua 2m - 1 piece	Unique

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 20-10-2026 . Technical changes reserved.

