


DATASHEET

A-DQ(ZN) B2Y OM3 50/125µm SC/LC 24G 1,0m

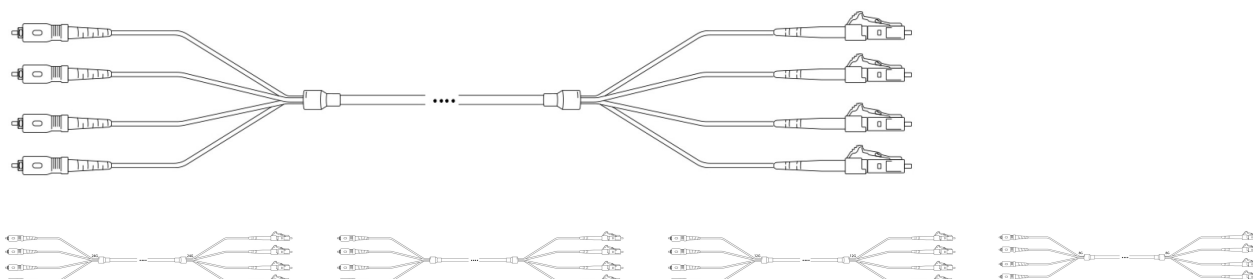

General data

Outdoor Suitable for direct burial, duct or shaft installation
 Primary cabling (Campus), Backbone
 PE jacket black , non-metallic, longitudinal water tight
 UV resistant, rodent resistant
 Central/Loose tubes, 250µm coating. The cable diameter can vary.

Characteristics and advantages of Trunk cables:

- 2 up to 48 fibers per cable (other Trunks available on request)
- Pre-assembled, polished and factory-tested
- Both-sided assembled with stepped plug whips
- Ready to use, no need for expensive splice- and measuring equipment
- With Premium or Standard cable divider at customers choice
- Attenuation protocol for each assembled connector included in delivery
- All possible combinations of connectors like LC, E2000®, SC and ST available
- Identification with cable markers
- Delivery depending on length and type: one way drum or cable ring

Technical properties

Category	OM3
Coding	1:1
Colour outer sheath	black
Connector connection 1	SC
Connector connection 2	LC
Crossed	No
Fibre type	OM3 50/125
Flame retardant	False
Halogen free (according to EN 50267-2-3)	False
Material outer sheath	PE
Operating temperature	-25 - 60 °C
Storage Temperature	-25 - 70 °C
With rodent protection	True

This datasheet was created automatically on 12-09-2026 . Technical changes reserved.



DATASHEET

A-DQ(ZN) B2Y OM3 50/125µm SC/LC 24G 1,0m

Available variants

ArtNr.	Bezeichnung	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
O8302.1ADQOM3	A-DQ(ZN) B2Y OM3 50/125µm SC/LC 4G 1,0m	1.0 m	4	4	4
O8325.1ADQOM3	A-DQ(ZN) B2Y OM3 50/125µm SC/LC 8G 1,0m	1.0 m	8	8	8
O8344.1ADQOM3	A-DQ(ZN) B2Y OM3 50/125µm SC/LC 12G 1,0m	1.0 m	12	12	12
O8393.1ADQOM3	A-DQ(ZN) B2Y OM3 50/125µm SC/LC 24G 1,0m	1.0 m	24	24	24

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 12-09-2026 . Technical changes reserved.

