
DATASHEET

U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 8E 1,0m

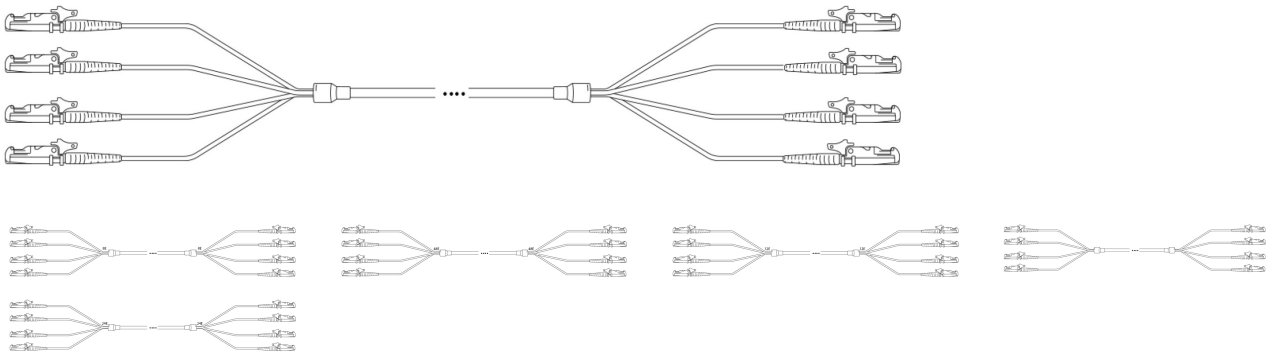

General data

Characteristics and advantages of Trunk cables:
- 2 up to 48 fibers per cable (other Trunks available on request)
- Pre-assembled, polished and factory-tested
- Both-sided assembled with stepped plug whips
- Ready to use, no need for expensive splice- and measuring equipment
- With Premium or Standard cable divider at customers choice
- Attenuation protocol for each assembled connector included in delivery
- All possible combinations of connectors like LC, E2000®, SC and ST available
- Identification with cable markers
- Delivery depending on length and type: one way drum or cable ring

Technical properties	
Category	G657A1
Coding	1:1
Colour outer sheath	black
Connector connection 1	E2000®
Connector connection 2	E2000®
Crossed	No
Fibre type	G657A1 9/125
Flame retardant	acc. to EN 50265-2-1
Halogen free (according to EN 50267-2-3)	True
Material outer sheath	LSZH
Operating temperature	-20 – 60 °C
Storage Temperature	-40 – 80 °C
With rodent protection	True

Available variants

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 8E 1,0m

ArtNr.	Bezeichnung	Length	Number of connectors connection 1	Number of connectors connection 2	Number of fibres
O8125.1	U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 4E 1,0m	1.0 m	4	4	4
O8146.1	U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 12E 1,0m	1.0 m	12	12	12
O8461.1	U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 8E 1,0m	1.0 m	8	8	8
O8834.1	U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 24E 1,0m	1.0 m	24	24	24
O8855.1	U-DQ(ZN)BH G657A 9/125µm E2000®/E2000® 48E 1,0m	1.0 m	48	48	48

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION