


DATASHEET

Network Cabinet OFFICE 15U, 600x600 mm, RAL7035



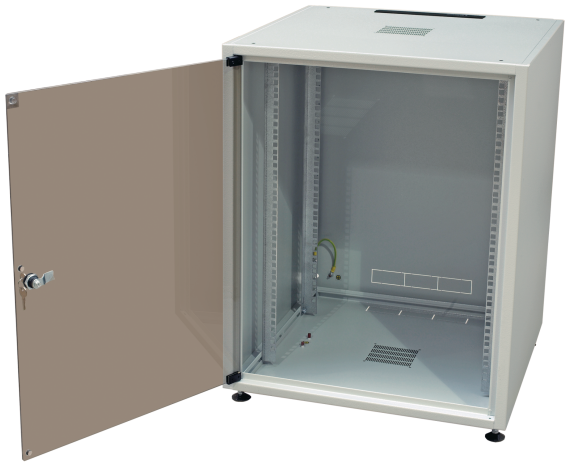





General data

The 19" OFFICE 15 U network cabinet from EFB-Elektronik in 600 x 600 mm and RAL 7035 is designed for compact installations in the network and IT environment. It combines a self-supporting, completely pre-assembled frame with practical equipment for the structured installation of active and passive components.

• 15U in 19" format – Provides a compact design for space-saving office and technical network installations.
• Full glass door made of certified safety glass and replaceable door hinge – Facilitates visual inspection of the equipment and supports flexible installation.
• Passive ventilation, cable entries in the roof, floor and rear wall as well as a maximum load capacity of 38 kg – Enables clean cable routing and a clearly defined area of application.

The cabinet is suitable for installations with limited space and structured cable routing. Passive ventilation supports thermally non-critical operation, while the pre-punched, break-out cable entries in the roof, floor and rear wall allow flexible feeding of the cables. The mounting levels at the front and rear as well as the replaceable front door facilitate assembly and maintenance during operation.

Technical details
• Number of doors: 1
• Degree of protection: IP20 according to EN 60529
• Type of ventilation: passive
• With earthing: Yes

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Network Cabinet OFFICE 15U, 600x600 mm, RAL7035

- With roof panel: Yes
- With front door: Yes
- With side panels: Yes
- Mounting level: front and rear
- Front door design: one-piece full glass door (certified safety glass, glass thickness 4 mm)
- Front door locking: 1-point quarter-turn latch
- Reversible front door hinging: Yes
- Rear door design: steel rear wall
- Cable entry roof/floor: 2 pre-punched, break-out openings (1 x roof, 1 x floor), each approx. 245 x 35 mm
- Cable entry rear door: 2 x pre-punched, break-out opening, each approx. 245 x 35 mm
- Number of rack units (U): 15 U
- Width: 600 mm
- Height: 737 mm
- Depth: 600 mm
- Finish of the surface: powder-coated
- Frame: self-supporting, completely pre-assembled
- Max. load capacity: 38 kg
- Scope of delivery: 1x cabinet, 1 x brush strip, 4 x levelling feet M8, 2 x keys
- Packaging: Delivered in transport packaging on a single-use pallet

Technical properties	
Active air conditioning	False
Cabinet Series	Office
Cable entry rear door	2 x pre-cut, breakable openings, each approx. 245 x 35 mm
Cable entry roof/floor	2 pre-cut, breakable openings (1 x roof, 1 x base), each approx. 245 x 35 mm
Category	19" network cabinet according to DIN41494
Degree of protection	IP20 according to EN60529
Demountable	False
Door hinge reversible front door	True
Frame	self-supporting, completely pre-assembled
Material	Steel
Model	With permanent frame
Modular spacing	482,6 mm (19 inch)
Mounting level	Front and rear
PHC replaceable front door	False,
PHC replaceable rear door	False
Packaging	Delivery in transport packaging on a disposable pallet
Scope of delivery	1x cabinet, 1 x brush strip, 4 x leveling feet M8, 2 x keys
Stackable	False
Surface finishing	Powder coating

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Network Cabinet OFFICE 15U, 600x600 mm, RAL7035

Toolless depth adjustment	False
Type of back door	Rear wall
Type of front door	Full glass door 1-part (certified safety glass, glass thickness 4 mm)
Type of profile rail	L-shaped
Type of ventilation	Passive
With backside door	False
With earthing	True
With front door	True
With roof plate	True
With sidewall	True
With socket	False

Available variants

ArtNr.	Bezeichnung	Colour	Depth	Front door locking system	Material front door	Material rear door	Max. load capacity	Number of height units	Width	With glazed door	With vertical cable management	Height	RAL-number	Number of doors
OFF-1266GR.V1RW	Network Cabinet OFFICE 12U, 600x600 mm, RAL7035	grey	600 mm	1-point latch locking mechanism	Glass	Steel	30 kg	12 U	600 mm	True	False	604 mm	7035	1
OFF-1566GR.V1RW	Network Cabinet OFFICE 15U, 600x600 mm, RAL7035	grey	600 mm	1-point latch locking mechanism	Glass	Steel	38 kg	15 U	600 mm	True	False	737 mm	7035	1
OFF-1866GR.V1RW	Network Cabinet OFFICE 18U, 600x600 mm, RAL7035	grey	600 mm	1-point latch locking mechanism	Glass	Steel	45 kg	18 U	600 mm	True	False	871 mm	7035	1

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION