


DATASHEET

Door for OFFICE 12U, W=600 mm, Full Glass, 1-Part, LL

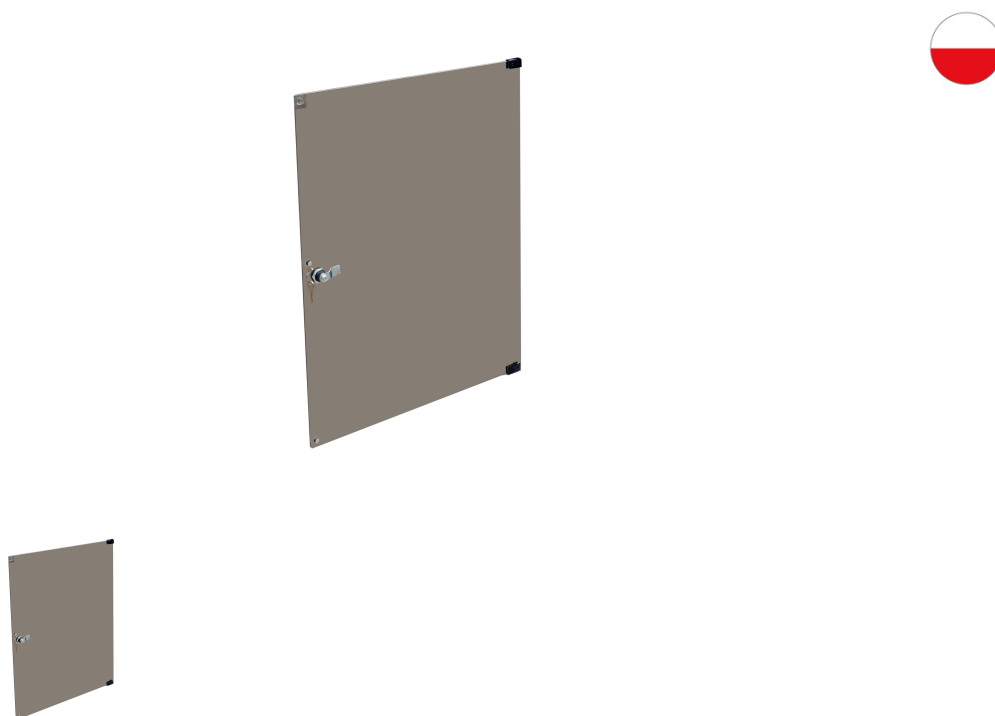

General data

One part glass door for cabinet series OFFICE
 Material certified safety glass, thickness 4 mm
 Door stop possible right and left-sided
 Included in delivery: 1 x door incl. latch locking, hinges, key

Technical properties

Cabinet Series	Office
Degree of protection	IP20
Door opening angle	ca. 120 °
For Cabinet Width	600 mm
Material	Glass
Model	Stop door
Number of height units (U)	12
Profile half-cylinder exchangeable	True
Scope of delivery	Tür, inkl. Scharnieren, 2 x Schlüssel
Structure/Use	Glastür, einteilig, mit Vorreiberverschluss
Surface finishing	Other
Type of closure	Single-point latch locking

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.



DATASHEET

Door for OFFICE 12U, W=600 mm, Full Glass, 1-Part, LL

Version as glazed door

True

Available variants

ArtNr.	Bezeichnung	Building width for cabinet build in	Colour	Height	Width	EMC-version	Version as door for disconnecting switch interlocking
OFF-TUR126V1	Door for OFFICE 12U, W=600 mm, Full Glass, 1-Part, LL	600 mm	farblos	568 mm	549 mm	False	False

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 23-09-2026 . Technical changes reserved.

