


# DATASHEET

## Door for PRO 42U, W=800, Glass, 1-Part, TH, RAL9005

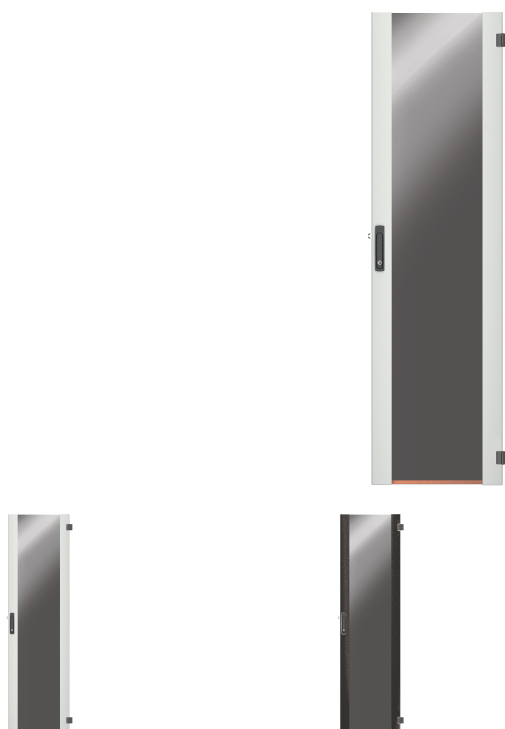

### General data

1-part glass door for 42U cabinets PRO in width 800 mm  
 Window made of certified safety glass (thickness 5 mm)  
 3-point-locking with turning handle and profile half-cylinder acc. to DIN18252 / EN1303 (PHC exchangeable by customer)  
 Door opening angle 180°  
 Paint finish (steel elements) RAL7035, light grey / RAL9005, jet black  
 Delivery pre-assembled incl. all hinges, screws, 2 x key

### Technical properties

|                                    |                                                                |
|------------------------------------|----------------------------------------------------------------|
| Cabinet Series                     | PRO                                                            |
| Degree of protection               | IP20                                                           |
| Door opening angle                 | 270 °                                                          |
| For Cabinet Width                  | 800 mm                                                         |
| Material                           | Glass, side elements steel                                     |
| Model                              | Stop door                                                      |
| Number of height units (U)         | 42                                                             |
| Profile half-cylinder exchangeable | True                                                           |
| Scope of delivery                  | Tür, inkl. Scharnieren, Schrauben, Erdungskabel, 2 x Schlüssel |

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## Door for PRO 42U, W=800, Glass, 1-Part, TH, RAL9005

|                        |                                                 |
|------------------------|-------------------------------------------------|
| Structure/Use          | Glastür, einteilig, mit Schwenkhebel            |
| Surface finishing      | Steel elements powder-coated                    |
| Type of closure        | 3-point rod locking mechanism with swivel lever |
| Version as glazed door | True                                            |

### Available variants

| ArtNr.          | Bezeichnung                                         | Building width for cabinet build in | Colour | Height  | Width  | RAL-number | EMC-version | Version as door for disconnecting switch interlocking |
|-----------------|-----------------------------------------------------|-------------------------------------|--------|---------|--------|------------|-------------|-------------------------------------------------------|
| PRO-TUR428G1.GR | Door for PRO 42U, W=800, Glass, 1-Part, TH, RAL7035 | 800 mm                              | grey   | 1885 mm | 722 mm | 7035       | False       | False                                                 |
| PRO-TUR428G1.TS | Door for PRO 42U, W=800, Glass, 1-Part, TH, RAL9005 | 800 mm                              | black  | 1885 mm | 722 mm | 9005       | False       | False                                                 |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

