


DATASHEET

USB-A to USB-C cable set 60W QC 3A 2x2m grey gold contacts textile coat

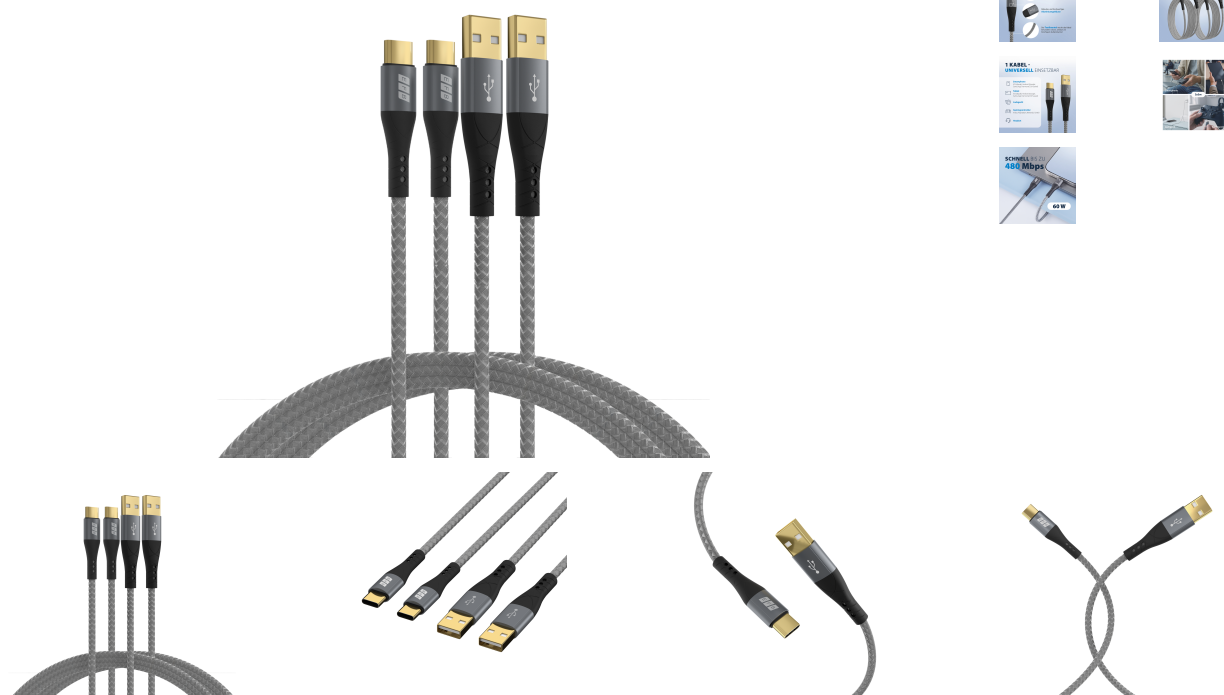

General data

USB-A to USB Type-C Charging Cable Set - 60W, Textile Sheath, 2 x 2m

Our **USB charging cable set** offers flexible combinations with **2 x 2m length** high-quality cables supporting **up to 60 watts** charging power. The sets are ideal for professional use in sales, office, or warehouse environments.

Product Features:

- **2 x USB-A to USB Type-C charging cables** for fast, reliable charging
- **Supports** up to **60W** and the Quick Charging Standard **QC**
- **480 Mbit/s** data transfer rate
- **Included in the set:** 2 x 2m Quick Charging Cable
- **Gold-plated USB-A and USB Type-C connectors** with **aluminum housing** - for stable connection and long durability

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.



DATASHEET

USB-A to USB-C cable set 60W QC 3A 2x2m grey gold contacts textile coat

- **Robust textile sheath (space gray)** – abrasion-resistant, kink-resistant, durable
- **Charging lightning bolt icon** as a visual usage aid (no LED)
- **Plastic-free individual packaging**, ready for shipping
- **Environmentally friendly:** paper cable ties, no plastic accessories
- **Application & Target Groups:**

Ideal for system integration, device accessories, workplace cabling, conference technology, and educational or governmental technology. Suitable for notebooks, tablets, smartphones, and all USB-C compatible devices.

Technical properties	
3D	False
ARC	False
Backwards compatible	True
Bending radius (dynamic/static)	40 mm
CEC	False
Cable set	True
Cable type (passive/active/optical)	passive
Chip	False
Connection type connection 1	Plug
Connection type connection 2	Plug
Connector 1 angulation	180°
Connector 2 angulation	180°
Contact Plating	gold-plated
DSC	False
Dust cover	false
Fast Charging technologie	QC 2.0
HDMI Power	False
HDMI certified	False
HEC (Ethernet channel)	False
Halogenfree	No
Kink protection	True
MSA	False
MST	False
Material Connector Housing	Aluminium
Material Inner Conductor	BC

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.

DATASHEET

USB-A to USB-C cable set 60W QC 3A 2x2m grey gold contacts textile coat

Material jacket	PVC+Textile
Max. mating cycles	10000
Model	Round Cable
Number of poles connection 1	4
Number of poles connection 2	5
Number of shieldings	double
Operating temperature	-5 - 45 °C
PCIe Data transfer	False
Plug dimensions Side 1	12 x 4.5 x 20.5mm
Plug dimensions Side 2	8.25 x 2.35 x 14.5mm
Power Delivery	60 W
Scope of delivery	2xUSB Cable
Shielded	True
Speed	480 Mbit/s
Temperature	-20 - 70 °C
Tensile strength (short/long)	98,1 N
Type of connector connection 1	USB-A
Type of connector connection 2	USB Type-C
Type of packaging	paper box
VESA certified	False
VRR	False
Various lengths cable set	2x2m
Version	USB 2.0 High-Speed
Warranty	36 months
With termination resistor	False
eARC	False

Available variants

ArtNr.	Bezeichnung	Colour	Diameter AWG
USB-AC-00007	USB-A to USB-C cable set 60W QC 3A 2x2m grey gold contacts textile coat	space grey	4.0 mm 22AWG

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 11-09-2026 . Technical changes reserved.

