


DATASHEET

Splice box fixed 1U without front panel, unequipped, grey

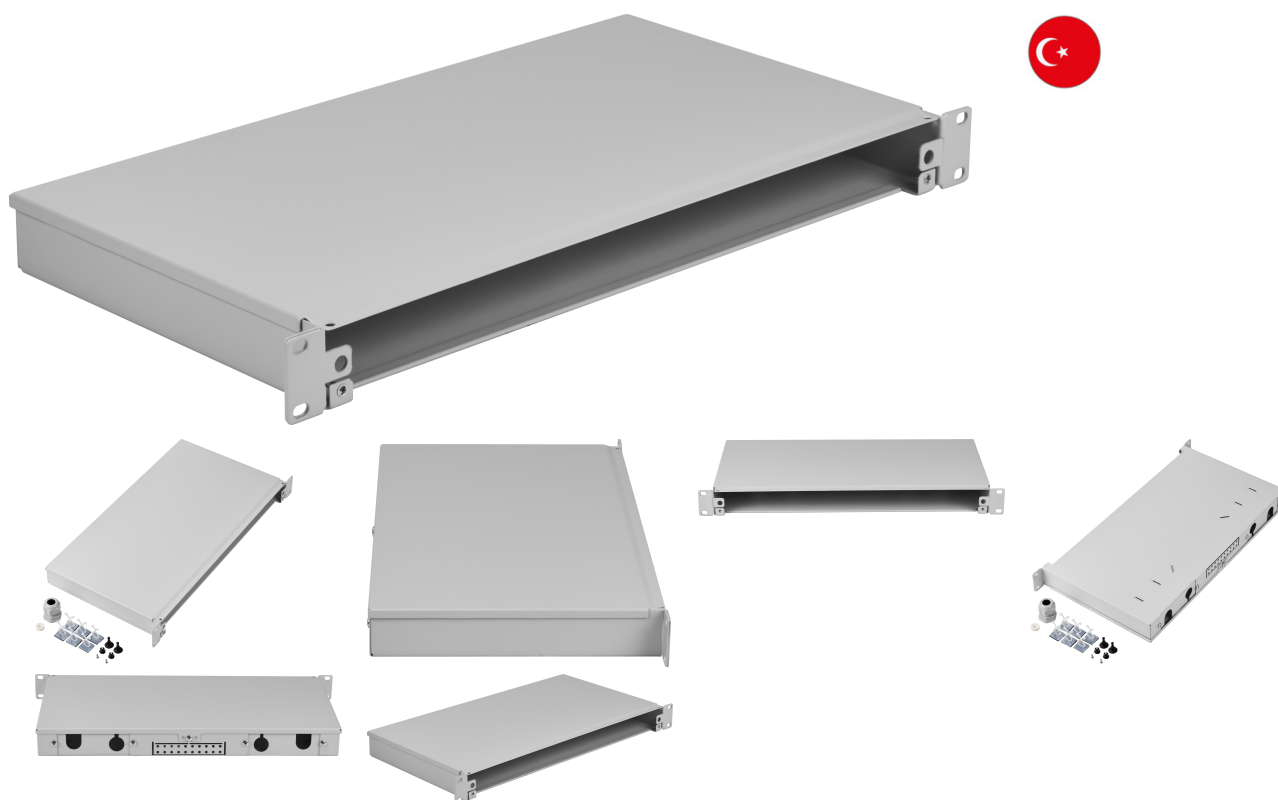

General data

Material sheet steel
 With sleeve nut (art. no. 80555.1) max. 4 splice cassettes can be installed
 Cable entry at the rear, prepared for PG16/M20
 Interchangeable bracket for straight and angled cable entry
 Cable entry in the centre for thinner cables

Technical properties

Mounting method	482.6 mm (19 inch) mounting
Number of height units	1 U
Sliding	non sliding version
Suitable for number of module inserts	-
With front plate	False
With housing	True
With pigtails	False

Available variants

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.



DATASHEET

Splice box fixed 1U without front panel, unequipped, grey

ArtNr.	Bezeichnung	Colour	RAL-number
VSB-F-GR	Splice box fixed 1U without front panel, unequipped, grey	grey	7035
VSB-F-SW	Splice box fixed 1U without front panel, unequipped, black	black	9005

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 18-09-2026 . Technical changes reserved.

