


DATASHEET


Backframe for Wall 19" X-Rack 400-600mm 9U 600x500mm El-galvinized 1/3




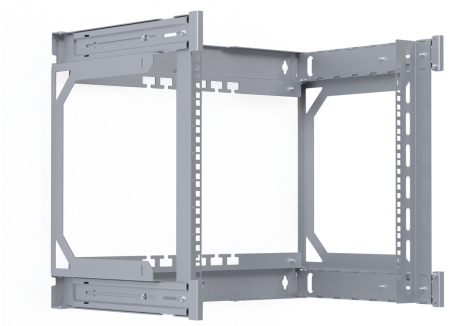









General data

New generation of 19” wall cabinets, which gives the installer 100% flexibility during installation.
The assembly process of the rack is done during the installation of hardware into the cabinet. All the cover plates (side walls, roof + bottom and front door) can be installed on the final end of the job.
By ordering the back frame separately, you can wait to order cover plates and front door until the color are decided.

Back frame for 19” wall housing “X-Rack”, depth-adjustable to 400, 450, 500, 550 and 600 mm
19” profiles depth-adjustable
100% Protection against installation error due to equal roof and bottom
Maximum load 60 kg for static equal distribution
Protection degree IP20 when using the outer cover
El-galvanised steel plates for higher quality

This datasheet was created automatically on 03-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Backframe for Wall 19" X-Rack 400-600mm 9U 600x500mm El-galvinized 1/3

Arrangement for cable strain relief in top and bottom
Side walls + roof and bottom elements can be ordered separately
M5 screw pin, for grounding connection in all 4 frame corners

General data:

Modular spacing 19” inch, 482,6 mm
Material & surface inner parts El-galvanised Z275, steel plate
Degree of protection IP20
Maximum load 60 kg
Width 600 mm
Height 9U:500 mm / 12U: 600 mm / 15U: 766 mm
Depth Adjustable 400 mm, 450 mm, 500 mm, 550 mm, 600 mm
Wall hanging support Keyholes for 2 x M8 bolts in upper and lower profile
Packaging Package no 1 of 3, recycled cartonboard

Technical properties	
Cabinet Series	19" Wall Housing X-Rack, un-assembled
Cable entry roof/floor	Open frame
Degree of protection	IP20
Demountable	False
Frame	Locking mechanism
Installation depth min. - max.	310 - 510 mm
Material	Steel
Max. spacing of the 19" levels	255 - 455 mm (bei installierten rückseitigen 19" Profilen)
Model	With permanent frame
Modular spacing	482,6 mm (19 inch)
Mounting level	Front side
Number of cartons	1
Number of doors	0
Packaging	1 carton
Scope of delivery	1x Cabinet
Structure/Use	Open rear frame of the X-Rack wall-mount enclosure for single use. Includes 2 x 19" front-mounted profiles "Angle bracket set for additional stabilization available, part no. WGX-WKS01 Additional 19" rear-mounted profiles available, part no. WGX-PROxx
Surface finishing	Galvanized
Type of profile rail	L-shaped
Type of ventilation	Passive

This datasheet was created automatically on 03-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Backframe for Wall 19" X-Rack 400-600mm 9U 600x500mm El-galvinized 1/3

With earthing	True
With front door	False
With roof plate	False
With sidewall	False

Available variants

ArtNr.	Bezeichnung	Colour	Depth	Height	Max. Load	Number of height units	Width
WGX-BF09	Backframe for Wall 19" X-Rack 400-600mm 9U 600x500mm El-galvinized 1/3	zinc	400-600 mm	500 mm	60 kg	9 U	600 mm
WGX-BF12	Backframe for Wall 19" X-Rack 400-600mm 12U 600x600mm El-galvinized 1/3	zinc	400-600 mm	600 mm	60 kg	12 U	600 mm
WGX-BF15	Backframe for Wall 19" X-Rack 400-600mm 15U 600x766mm El-galvinized 1/3	zinc	400-600 mm	766 mm	60 kg	15 U	600 mm

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 03-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION