



E2000®/APC Pigtails to E2000®/APC Adapter Angled completely assembled, splice box 19" 1U, RAL7035

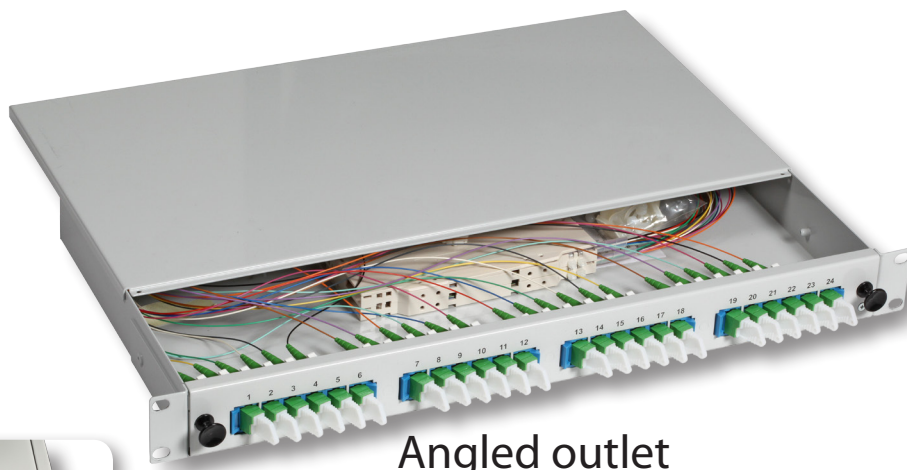

Angled outlet

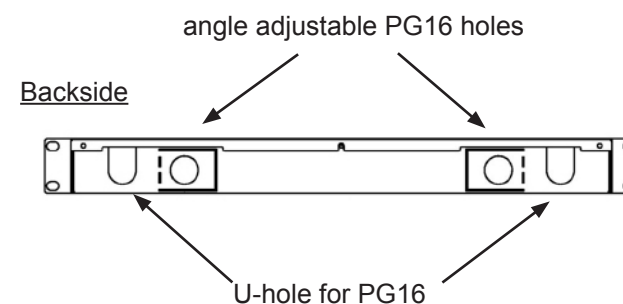

Completely assembled, slideless unit splice box 19" 1U, RAL7035

Art.-No.	Pigtail	Adapter
9/125µ OS2		
B70533SA.24	24 x E2000®/APC coloured	24 x E2000® green

further options

B70533SATS.24	with splice box in black RAL9005
BA70533SA.24	with splice box ready to splice (s. S.14)

Completely assembled, sliding unit splice box 19" 1U, RAL7035

Art.-No.	Pigtail	Adapter
9/125µ OS2		
B71533SA22	24 x E2000®/APC coloured	24 x E2000® green

further options

B71533SATS.24	with splice box in black RAL9005
BA71533SA.24	with splice box ready to splice (s. S.14)

- 1 splice cassette with 1 splice holder each per 12 fiber pigtails
- 6 x Self adhesive fiber tray
- Up to 4 splice cassettes adaptable *
- Front panel screwed
- Depth adjustable
- Cable entry backside, with 1 x PG16 gland
- Coloured Adapter

[Special assembly possible at short notice!](#)

* For mounting of 4 splice cassettes, please order additionally the sleeve nut 80555.1

RoHS
compliant

Created BT	Date 28.05.13	E2000®/APC Pigtails to E2000®/APC Adapter Angled completely assembled, splice box 19" 1U, RAL7035	File: B7x533xx.xx 
Last rev. BT	Date 17.07.13		