


# DATASHEET

## 19" 3U Power Distribution/Circuit Braker Housing for 22 Modules 17.5 mm, RAL9005

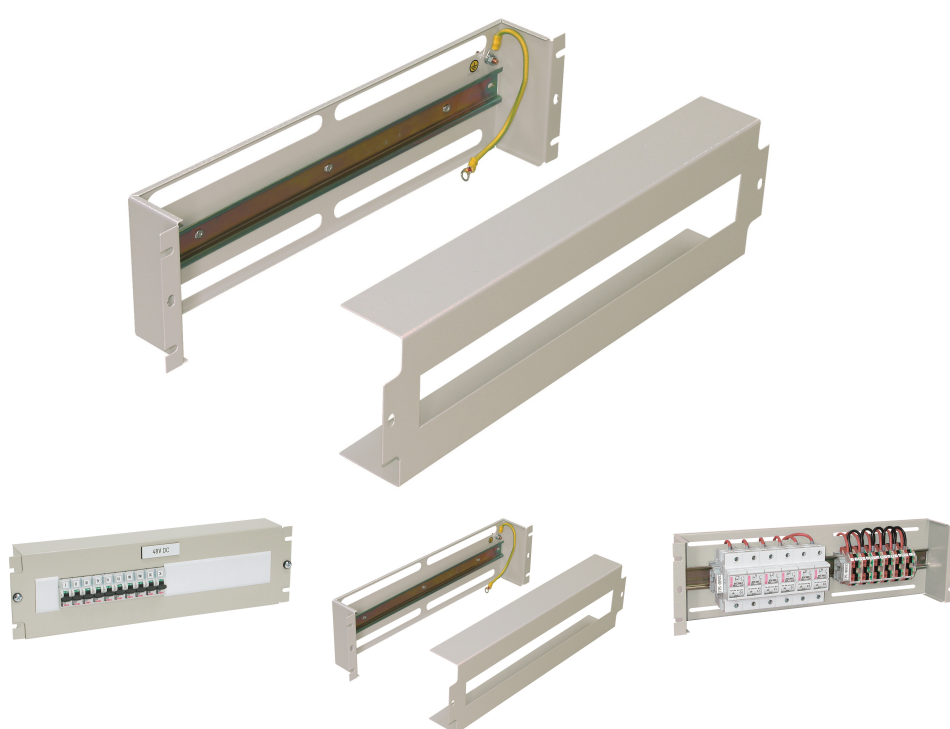

### General data

For carrying DIN rail modules like circuit breakers, outlets etc.

Capacity 22 modules to 17.5 mm

Front opening 402.5 x 45.5 mm

Rear-sided earthing bolt M5 incl. cable

Dimensions (W x H x D) 482.6 x 133 x 60 mm

Material steel sheet

Paint finish RAL7035, light grey / RAL9005, jet black

**Mounting note:** For easy opening and closing of the front cover, a captive nut M6 should be installed behind the left & right cover screw.

### Technical properties

|                   |                                                                             |
|-------------------|-----------------------------------------------------------------------------|
| Cabinet Series    | Universal                                                                   |
| Material          | Steel                                                                       |
| Model             | Device carrier                                                              |
| Packaging         | Cardboard                                                                   |
| Scope of delivery | 1 x Power distribution/circuit breaker housing, cover, mounting accessories |

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.



# DATASHEET

## 19" 3U Power Distribution/Circuit Braker Housing for 22 Modules 17.5 mm, RAL9005

|               |                                                                                                                                                                                                                                                                 |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Structure/Use | For 22 DIN rail modules, each 17.5 mm. Rear openings for cable entry. Rear M5 grounding bolt including cable.<br>Installation note: For easy opening and closing of the front cover, an M6 cage nut should be installed behind the right and left cover screws. |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Available variants

| ArtNr.       | Bezeichnung                                                                      | Colour | Depth | Width    | Height | RAL-number | Usable Width |
|--------------|----------------------------------------------------------------------------------|--------|-------|----------|--------|------------|--------------|
| 691277.1V2   | 19" 3U Power Distribution/Circuit Braker Housing for 22 Modules 17.5 mm, RAL7035 | grey   | 60 mm | 482.6 mm | 133 mm | 7035       | 402.5 mm     |
| 691277TS.1V2 | 19" 3U Power Distribution/Circuit Braker Housing for 22 Modules 17.5 mm, RAL9005 | black  | 60 mm | 482.6 mm | 133 mm | 9005       | 402.5 mm     |

### Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 01-11-2026 . Technical changes reserved.

