


DATASHEET

19" 1U Socket Strip 8xCEE 7/5(UTE) red, Cable C14,10 A Overload Protection, Black

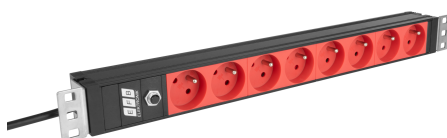

General data

19" 1U socket strip in aluminium profile
Outlets 8 x CEE 7/5 (UTE)
With overload protection 10 A
With increased personal protection against electric shock
Cable 2.0 m H03VV-F 3G 1.0 mm² with plug IEC C14
Colour outlets red, housing aluminium black
Certifications CE, RoHS

Technical properties

Angle rotated central insert	45°
Colour of power cord	black
Core cross section	1.00 mm ²
Degree of protection	IP20
Halogen free	No
Housing shape	Rectangular
Length of power cord	1.8 m
Mains filter	False

This datasheet was created automatically on 07-09-2026 . Technical changes reserved.



DATASHEET

19"1U Socket Strip 8xCEE 7/5(UTE) red, Cable C14,10 A Overload Protection, Black

Material	Metal
Material quality	Aluminium Aluminium
Max. connected load	2500 W
Mounting dimension (standardised)	465 mm
Nominal current	10 A
Nominal voltage	250 V
Number of height units (U)	1 U
Number of phases	1
Over voltage protection	False
Packaging	Polybag in cardboard box
Residual current circuit breaker (RCCB)	False
Rotated central insert	True
Scope of delivery	1 x power strip incl. mounting brackets
Surface finishing	Matt
Surface treatment	Anodised
Thermal fuse	True
Transparent	False
Type of mains connection	C14
With cover lid	False

Available variants

ArtNr.	Bezeichnung	Anti-bacterial treatment	Colour	Compatible with Amazon Alexa	Compatible with Apple HomeKit	Compatible with Google Assistant	IFTTT support available	Number of socket outlets French standard (Type E)	Number of socket outlets with standard earth pin	With on/off switch	Height	RAL-number (similar)
EK631CF.1V2	19"1U Socket Strip 8xCEE 7/5(UTE) red, Cable C14,10 A Overload Protection, Black	False	black	False	False	False	False	8	8	False	45 mm	9005

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

This datasheet was created automatically on 07-09-2026 . Technical changes reserved.

