
DATASHEET

Duplex Patchcable Push/Pull LC-LC OS2 G657A1 0,5m LSZH 3mm yellow

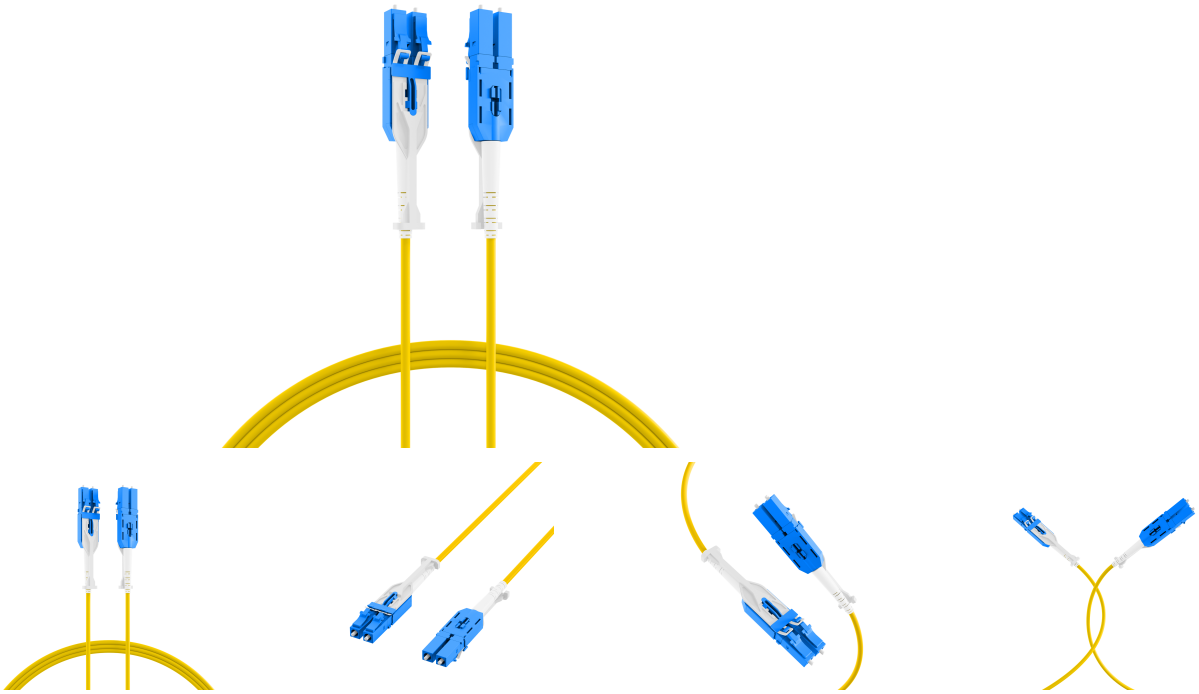

General data

The LC HD Uniboot Jumper has a long unlock latch, due to unlock in the easiest way in HD patchpanel. The Polarity or Coding of the Duplex connector can be changed in the easiest way that it can reach the requirements of the application. The Jumper is available in the categories OM3, OM4 and G657A1.

Technical properties

Anti-kink sleeve	put-on
Bend optimized fiber	yes
Cable structure	Duplex
Cable type	I-V(ZN) H
Cable Ø	3 mm
Category	OS2 G657A1
Colour outer sheath	yellow
Fibre type	Singlemode 9/125
Flame retardant	acc. to IEC 60332-1-2
Halogen free	acc. to IEC 62821
Insertion loss 1310nm	≤0,15 dB

This datasheet was created automatically on 10-11-2026 . Technical changes reserved.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

DATASHEET

Duplex Patchcable Push/Pull LC-LC OS2 G657A1 0,5m LSZH 3mm yellow

Low smoke	acc. to IEC 61034
Material outer sheath	LSZH
Min. Bending radius (Dynamic)	>20xOD mm
Min. Bending radius (Static)	>10xOD mm
Number of fibres	2
Operating Temperature	-20 – 60 °C
Packaging	EFB-Electronics poly bag (resealable)
Reinforcment	Aramid
Return loss 1550nm	≥45 dB
Return loss 1310nm	≥45 dB
Scope of delivery	1x Patchcable, 2x Duplex Clip, 1x Measurement Report, 1x Information Sheet
Storage Temperature	-20 – 70 °C
Type of connector connection 1	LC (Push/Pull)
Type of connector connection 2	LC (Push/Pull)

Available variants

ArtNr.	Bezeichnung	Length	Length tolerance
DJP-LCLCOS2-UNI-0,5	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 0,5m LSZH 3mm yellow	0.5 m	±5 %
DJP-LCLCOS2-UNI-1	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 1m LSZH 3mm yellow	1.0 m	±5 %
DJP-LCLCOS2-UNI-10	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 10m LSZH 3mm yellow	10.0 m	±5 %
DJP-LCLCOS2-UNI-15	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 15m LSZH 3mm yellow	15.0 m	±5 %
DJP-LCLCOS2-UNI-2	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 2m LSZH 3mm yellow	2.0 m	±5 %
DJP-LCLCOS2-UNI-20	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 20m LSZH 3mm yellow	20.0 m	±5 %
DJP-LCLCOS2-UNI-3	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 3m LSZH 3mm yellow	3.0 m	±5 %
DJP-LCLCOS2-UNI-5	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 5m LSZH 3mm yellow	5.0 m	±5 %
DJP-LCLCOS2-UNI-7,5	Duplex Patchcable Push/Pull LC-LC OS2 G657A1 7,5m LSZH 3mm yellow	7.5 m	±5 %

Note on Intended Use

This data sheet is intended solely to describe the technical characteristics of the product. It does not replace an assessment of the product's suitability for a specific application. The user is responsible for ensuring that the product is used in accordance with its technical specifications and applicable legal and regulatory requirements.

EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION